

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES
EVALUATION/RETURN SHEET

REQUESTED ACTION: REMOVAL

PROPERTY NAME: Bell Ford Post Patented Diagonal "Combination Bridge"

MULTIPLE NAME:

STATE & COUNTY: INDIANA, Jackson

DATE RECEIVED: 7/29/16 DATE OF PENDING LIST:
DATE OF 16TH DAY: DATE OF 45TH DAY: 9/13/16
DATE OF WEEKLY LIST:

REFERENCE NUMBER: 05000194

REASONS FOR REVIEW:

APPEAL: N DATA PROBLEM: N LANDSCAPE: N LESS THAN 50 YEARS: N
OTHER: N PDIL: N PERIOD: N PROGRAM UNAPPROVED: N
REQUEST: N SAMPLE: N SLR DRAFT: N NATIONAL: N

COMMENT WAIVER: N

___ACCEPT ___RETURN ___REJECT _____DATE

ABSTRACT/SUMMARY COMMENTS:

**REMOVED
from
National Register**

RECOM./CRITERIA Remove
REVIEWER Edson Beall DISCIPLINE History
TELEPHONE _____ DATE 9-12-16

DOCUMENTATION see attached comments Y/N see attached SLR Y/N

If a nomination is returned to the nominating authority, the nomination is no longer under consideration by the NPS.

DNR Indiana Department of Natural Resources

Michael R. Pence, Governor
Cameron F. Clark, Director



Division of Historic Preservation & Archaeology • 402 W. Washington Street, W274 • Indianapolis, IN 46204-2739
Phone 317-232-1646 • Fax 317-232-0693 • dhpa@dnr.IN.gov • www.IN.gov/dnr/historic

July 20, 2016

Dr. Stephanie Toothman
Keeper of the National Register
National Park Service 2280
National Register of Historic Places
1201 "I" (Eye) Street, N.W.
Washington D.C. 20005

RECEIVED 2280

JUL 28 2016

Nat. Register of Historic Places
National Park Service

Re: Bell Ford Post Patented Diagonal "Combination Bridge" (Bell Ford Covered Bridge), Jackson County, Indiana

Dear Dr. Toothman,

We have been informed that the above property has been dismantled and moved. The property was listed in the National Register of Historic Places on March 25, 2005.

The bridge had suffered the collapse of the west span in 1999, prior to listing. The east span remained in place, and along with the salvaged truss members of the west span, all interested parties hoped to restore the bridge. In January 2006, the east span collapsed into the White River. The bridge components from the east span were removed from the river bed and put into storage, along with what remained of the west span. DHPA hoped the bridge might be rebuilt. It is now clear, after ten years, that the bridge will not be rebuilt on its original site. While we remain open to the possibility of relisting of the bridge on a new site, as it is, the bridge would need to be reassembled in an appropriate location and still retain a majority of its components and materials. At this point, we believe we are compelled to proceed with the delisting process, since the listed structure has been moved without prior documentation.

In accordance with 36 CFR 60.14(b), we are requesting that the property be removed from the National Register of Historic Places. Please address any questions you or your staff may have about this property to Paul Diebold.

Sincerely,

Paul C. Diebold
Assistant Director for Preservation Services

PCD:pcd

copy: file

enclosures: Ch. 8 news article, Republic newspaper article, correspondence with county, Covered Bridge newsletter of Winter 2006

United States Department of the Interior
National Park Service

FEB

National Register of Historic Places
Registration Form

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in How to Complete the National Register of Historic Places Registration Form (National Register Bulletin 16A). Complete each item by marking "x" in the appropriate box or by entering the information requested. If an item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions. Place additional entries and narrative items on continuation sheets (NPS Form 10-900a). Use a typewriter, word processor, or computer, to complete all items.

1. Name of Property

historic name **Bell Ford Post Patented Diagonal "Combination Bridge"**
other names/site number **Bell Ford Covered Bridge** 071-581-30009

2. Location

street & number **SR 258 1.5 miles West junction SR 258 and Community Drive** N/A not for publication
city or town **Seymour** vicinity
state **Indiana** code **IN** county **Jackson** code **071** zip code **47274**

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act, as amended, I hereby certify that this nomination request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36CFR Part 60. In my opinion, the property meets does not meet the National Register criteria. I recommend that this property be considered significant nationally statewide locally. (See continuation sheet for additional comments.)

[Signature] **2.3.05**
Signature of certifying official/Title **Indiana Department of Natural Resources**
Date
State or Federal agency and bureau

In my opinion, the property meets does not meet the National Register criteria. (See continuation sheet for additional comments.)

Signature of certifying official/Title _____ Date _____
State or Federal agency and bureau _____

4. National Park Service Certification

- I hereby certify that the property is:
 entered in the National Register.
 See continuation sheet.
- determined eligible for the National Register
 See continuation sheet.
- determined not eligible for the National Register
- removed from the National Register
- other, (explain:)

Signature of the Keeper **Patricia Andrews** Date of Action **3/25/2005**

5. Classification

Ownership of Property

(Check as many boxes as apply)

- private
- public-local
- public-State
- public-Federal

Category of Property

(Check only one box)

- building
- district
- site
- structure
- object
- landscape

Number of Resources within Property

(Do not include previously listed resources in the count)

Contributing	Noncontributing	
0	0	buildings
0	0	sites
1	0	structures
0	0	objects
1	0	Total

Name of related multiple property listing

(Enter "N/A" if property is not part of a multiple property listing.)

N/A

Number of contributing resources previously listed in the National Register

N/A

6. Function or Use

Historic Functions

(Enter categories from instructions)

TRANSPORTATION: Road-Related

Current Functions

(Enter categories from instructions)

WORK IN PROGRESS

7. Description

Architectural Classification

(Enter categories from instructions)

OTHER: Combination Truss

Materials

(Enter categories from instructions)

foundation STONE: Limestone

walls WOOD: Weatherboard

roof WOOD: Shake

other METAL: iron

WOOD: Log

Narrative Description

(Describe the historic and current condition of the property on one or more continuation sheets.)

**United States Department of Interior
National Park Service**

**National Register of Historic Places
Continuation Sheet**

Section 7 Page 1

Bell Ford Post Patented Diagonal "Combination Bridge", Jackson County, Indiana

Narrative Description

The Bell Ford Covered Bridge is located over the East Fork of the White River in rural Jackson County, about 20 feet above ordinary water level. This highway bridge connected Hamilton Township to Jackson Township on the Seymour and Cortland road, which eventually became State Road 258. The bridge is located in an agricultural area with few parcels less than .8 acre. It includes one abutment and two piers. There are two 160'0 spans (c-c of bearings). The West span blew down in 1999 during a freak windstorm. Most of the west span components have been saved. The East span remains in place. There are no nearby buildings. Upriver, within sight are piers from an abandoned railroad bridge. Down river 125 feet from Bell Ford is an 1969 concrete and steel bridge structure, which now carries SR 258. There is a DNR boat ramp to White River between the bridges with drainage and erosion control measures.

The Bell Ford Bridge is a parallel-chord, nineteenth century, two lane, two span through truss. The bridge's superstructure consists of wood, wrought iron eyebars and rods, and cast iron joint blocks. The wooden components consist of an oak deck, white pine upper chords and white pine kingposts. White pine, probably from New York, was utilized because of scientific theory, ease of construction and availability. The substructure consists of locally quarried limestone for two piers and one abutment placed upon oak grillage sunk in the riverbed, and surrounded with stone rip rap.

This bridge is a covered Post Patented Diagonal "Combination" Bridge with shake roof and yellow popular siding. The siding does not protect the lower chord members. There is a 2-foot gap between the siding and roof that allows light to filter into the bridge. At the center pier an opening thru siding exists on the North side to allow access to the center pier from the bridge. The Post truss is characterized as comprising wrought iron tension diagonals and non-vertical compression struts inclined towards midspan. In this "combination" truss all compression members are made from timber and all tension members are made from wrought iron.

The wooden struts of Bell Ford have an angle of about 19 degrees from vertical. The bridge length was 325 feet. Each span consists of fifteen 10-foot panels plus a half-length panel at each end for total span length of 160 feet from bearing to bearing. The oak deck width is 16 feet 2 inches wide, and 325 feet long. Vertical clearance is 13 feet. Construction depth will be 431 feet when rehabilitated including roadway approach.

A major alteration to this bridge is the gabled, shingled wooden roof and siding. When first built the top chords were individually covered with open sides. This is indicated by the original 1868 contract that state's "the top chords to be covered", and by a newspaper account eight years later noting two bridges in Jackson County, one being "the Bell Ford Bridge was not covered."¹ However, the top chords extended 18 inches past the end post at each corner of the bridge. When "enclosed" c. 1885, the roof was extended to the end of the top chords, while the siding stopped at the portal posts.

¹ Seymour Weekly Times, "Cover the Bridges", July 8, 1876, Col. 3, p. 1.

**United States Department of Interior
National Park Service**

**National Register of Historic Places
Continuation Sheet**

Section 7 Page 2

Bell Ford Post Patented Diagonal "Combination Bridge", Jackson County, Indiana

Narrative Description

The east pier of the Bell Ford Bridge is lacking the cutwater present on the center pier. Pier damage was reported in newspaper accounts in 1893 and 1913 but the exact damage and repair in both cases was not recorded. The original contract specifications indicated both piers were identical.

The bridge was constructed in 1868. It was one of the first Post Patented "Combination" bridges built after the issuance of two bridge patents to Andrew J. Post. The September 1, 1868, patent no. 81, 817. (Exhibit B) improvement in wooden bridges by Andrew J. Post is almost identical to the Bell Ford Post Diagonal "combination" design. This patented design is patterned after the 1863 iron bridge patent of Andrew's father, Simeon S. Post (Exhibit A) Andrew's patent specifies the wooden kingpost be rounded at the lower chord ends alleviating compression destruction of the wooden "vertical" timbers. This patent element is absent in the Bell Ford Bridge. Bell Ford has double portal members connected by H. M. Clafien's 1865 (Exhibit E) patent for improved mode of splicing timbers at the portals of each span. The top chord, panel posts, and lower chord arrangement of Bell Ford is identical to the original patented design of Andrew J. Post. (Exhibit B) The inclined kingposts were not present in the 1863 patent but the cast iron joint block and lower chord design arrangement appear identical to Bell Ford.

Bell Ford uses wrought iron eyebars for the lower chords, similar to an all-metal, pin connected truss. But in the one and a half panels at each end, Bell Ford possesses unique lower chords consisting of wrought iron straps on each side of a cast iron compression joint block. The abutment end is pinned to the portal struts. Each lower chord consists of four wrought iron eyebars in each panel, except near the ends of each span, where two eyebars per panel suffice.

Numerous replacement floors have been recorded. Reported bridge closings in 1895 and 1897 were due to structural approach repairs. Pictures indicate that some wooden "verticals" were reinforced during the Indiana Highway Commission's stewardship. It was closed due to structural bridge damage September 8, 1967 and reopened November 1967 when two (2) sixteen inch wooden floor beams were replaced in junction with wooden wedges for structural support. It remained open from November 15, 1967 until it was bypassed in 1969. Mr. Robert Harrell, a former Seymour district IHC supervisor indicated no major alterations had been made to the bridge structure during Indiana Highway Commission's possession. The bridge was replaced due to its narrowness for modern traffic and the 3-ton load limit.

Repairs to siding and roof in the 1980's by Jackson County Park and Recreation Board and application of turnbuckles in 1998 helped preserve the remaining span. The park board has maintained the bridge as a historic transportation structure for pedestrian traffic since its return to the county. After the windstorm, the collapsed span was salvaged and iron repair of this span is presently nearing completion under the National Historic Covered Bridge Grant. Wood repair, partial replacement, and replacement of wooden members will follow when rehabilitation construction occurs. The standing span has a bow in the lower chord, which has to be repaired. Wooden "verticals" will be inspected for structural damage from age and repaired. Structural repair will include more lateral bracing, roof replacement, and replacement of hanger bolts and replacement of lower chord lateral bracing. Reconstruction of roadway approaches for vehicular traffic is planned.

8. Statement of Significance

Applicable National Register Criteria

(Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing.)

- A** Property is associated with events that have made a significant contribution to the broad patterns of our history.
- B** Property is associated with the lives of persons significant in our past.
- C** Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.
- D** Property has yielded, or is likely to yield, information important in prehistory or history.

Criteria Considerations

(Mark "x" in all the boxes that apply.)

Property is:

- A** owned by a religious institution or used for religious purposes.
- B** removed from its original location.
- C** a birthplace or grave.
- D** a cemetery.
- E** a reconstructed building, object, or structure.
- F** a commemorative property.
- G** less than 50 years of age or achieved significance within the past 50 years.

Narrative Statement of Significance

(Explain the significance of the property on one or more continuation sheets.)

Areas of Significance

(Enter categories from instructions)

ENGINEERING _____

TRANSPORTATION _____

Period of Significance

1868 _____

Significant Dates

c.1885 _____

Significant Person

(Complete if Criterion B is marked above)

N/A _____

Cultural Affiliation

N/A _____

Architect/Builder

Blish, John (engineer) _____

Pattison, Robert (builder) _____

Hull, W. H. (designer) _____

9. Major Bibliographic References

Bibliography

(Cite the books, articles, and other sources used in preparing this form on one or more continuation sheets.)

Previous documentation on file (NPS):

- preliminary determination of individual listing (36 CFR 67) has been requested
- previously listed in the National Register
- previously determined eligible by the National Register
- designated a National Historic Landmark
- recorded by Historic American Buildings Survey # _____
- recorded by Historic American Engineering Record # IN-46

Primary location of additional data:

- State Historic Preservation Office
- Other State agency
- Federal agency
- Local government
- University
- Other

Name of repository: _____

Bell Ford Post Patented Diagonal
Name of Property

Jackson IN
County and State

10. Geographical Data

Acreage of Property Less than 1 acre

UTM References (Place additional UTM references on a continuation sheet.)

1	16	4314160	4912750	3			
	Zone	Easting	Northing		Zone	Easting	Northing
2				4			

See continuation sheet

Verbal Boundary Description

(Describe the boundaries of the property on a continuation sheet.)

Boundary Justification

(Explain why the boundaries were selected on a continuation sheet.)

11. Form Prepared By

name/title Barker Engineering; Fleeta K. Arthur, Angie R. Krieger and Dr. Loren Noblitt
organization Jackson County Park and Recreation Board date 05-01-00
street & number 6594 West State Road 58 telephone 812-497-2424
city or town Brownstown state IN zip code 47220

Additional Documentation

Submit the following items with the completed form:

Continuation Sheets

Maps

A **USGS map** (7.5 or 15 minute series) indicating the property's location.

A **Sketch map** for historic districts and properties having large acreage or numerous resources.

Photographs

Representative **black and white** photographs of the property.

Additional items

(Check with the SHPO or FPO for any additional items)

Property Owner

(Complete this item at the request of SHPO or FPO.)

name Jackson County Commissioners
street & number Brownstown Courthouse telephone 812/358-6121
city or town Brownstown state IN zip code 47220

Paperwork Reduction Act Statement: This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C. 470 *et seq.*).

Estimated Burden Statement: Public reporting burden for this form is estimated to average 18.1 hours per response including time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Chief, Administrative Services Division, National Park Service, P.O. Box 37127, Washington, DC 20013-7127; and the Office of Management and Budget, Paperwork Reductions Projects (1024-0018), Washington, DC 20503.

**United States Department of Interior
National Park Service**

**National Register of Historic Places
Continuation Sheet**

Section 8 Page 3

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Narrative Description

Ninety percent of the remaining timber will remain, except for lower end repair on the East span. All tension rods will be used and approximately 90% of the iron tension eyebars will be used. Floorbeams, stringers, & deck boards will be replaced. All of the cast iron connection joint blocks will be reused. Twenty-five percent of the original timbers will be repaired and reused on the West span. Ninety-five percent of the tension rods are repaired and will be reused. A portion of the eyebars will be used which meets the test load requirement. All of the cast iron joint blocks will be reused. All floorbeams, stringers, and deck boards will be replaced. Additional documentation will be submitted upon completion of the restoration of the collapsed East span of the Bell Ford Bridge.

The Park board will rehabilitate the bridge when we meet our required TE match to preserve the "combination" bridge as a historic structure and more importantly restore the bridge for light vehicular traffic. Future plans include a recreational site consisting of a grass/stone amphitheater, landscaping, and primitive restroom facilities for all recreational visitors. We will be seeking financial assistance from Indiana Department of Natural Resources for this site.

Statement of Significance

The Bell Ford Bridge Post Patented Diagonal "combination" bridge is being nominated to National Register of Historic Places under criterion C. Nationally significant, this bridge is the best representation of the American engineering "combination" bridge form as all tension members are metal while all compression members are wood. This bridge is the only remaining "combination" Post truss, and one of four Post trusses of any type of construction in the United States. Historically important, Bell Ford was the first fixed transportation structure that provided access across the East Fork of White River in Jackson County. It connected Hamilton Township and Jackson Township in the county. The bridge was officially opened January 1869 according to original company records, Commissioners' Record and newspaper accounts. Animal and vehicular transportation continued for about a century through this long span through truss bridge until 1970. It has continued as a historical structure with pedestrian access until 1999. The bridge is currently closed due to unsafe conditions. However, the one standing span of the bridge still represents a rare, transitional form of bridge building. The West collapsed span will retain its structural characteristics when rehabilitated.

Early settlement of Jackson County, established by territorial legislature in 1815, was between the forks of White River and the Muscatatack River. To export agricultural products from Hamilton Township, a bridge to Seymour was necessary. The opening of the Ohio and Mississippi Railroad at the newly created village of Seymour, in 1854; intersected with the Jeffersonville and Indianapolis Railroad created both a North and South transportation route, and an East and West transportation route. There are twelve bridges, which cross White River in Jackson County today, illustrating the division, which this river created in the development of the county. By 1887, six of eight long span county bridges bordered Hamilton Township, illustrating the importance of this agricultural area to the development of the county. A good road is a necessity for any agricultural society.

An old farmer recalled, "farmers west of White River had to feed their produce into stock principally hogs because they could

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 8 Page 4

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Statement of Significance

not afford to "wagon it to market". We then had to cross the river on ferryboats when not fordable, and the condition of the roads seldom admitted more than fifteen to twenty-five bushels of corn or wheat for a two-horse load. The ferry fees would cost forty cents for the round trip."² The bridge toll like the ferry fees depended upon the traveler's mode of transportation and was established by the county commissioners each year.

Bell Ford is significant in the context of mid-nineteenth economic growth in Seymour, Indiana. Seymour was platted in 1852, late in the history of Jackson County. The town's development is directly linked to the construction of the Ohio & Mississippi Railroad. The prosperity of the city developed around the O & M machine shop, the mill, and the O & M railroad; which junctioned with the J, & I (J, M, I) railroad at Seymour. The O & M rail line was projected and located to link with all mill sites along the route to export agricultural products from the White River Valley and Wabash River Valley in Indiana. Heretofore, agricultural products had been left to waste due to an inadequate transportation infrastructure to available markets.

The Bell Ford Bridge derives its name from an early Hamilton Township settler and one of the first resident ministers in Hamilton Township who resided near a slate bottom ford half-mile (1/2) downstream from the Bell Ford Bridge. Early settlers crossed at this river ford by swimming, riding and finally by "ferryboat in 1858" upon Meedy W. Shield's property on the east bank and Samuel Fearn's property on the west bank."³ on White River. The Seymour Bridge Company was authorized by commissioners to construct the White River Bridge July 7, 1868. The Bell Ford Bridge "contract was signed July 23, 1868 by the company and Robert Pattison for a Post's Patent Diagonal Combination Bridge."⁴

Statewide, Bell Ford is one of ninety-one (91) remaining Indiana covered bridges. It was "enclosed" c. 1885 by the Seymour, Cortland and Freetown toll road company that provided maintenance for the bridge until 1896 when it was returned to the county. Bell Ford became a transportation structure for the Indiana Highway Commission from "October, 1934"⁵ as part of SR. 258 until it was returned to Jackson County Commissioners' in 1970. It was one of three; documented Indiana highway "Post" bridge structures manufactured by McNairy, Claflen & Co. of Cleveland, Ohio for Indiana highways. It is the one of two identified Post "combination" structure built in Indiana. Furthermore, it is one of ten documented "Post" trusses manufactured by the above company for Indiana railroads and highways. (Exhibit D) Due to pictorial information and preliminary research the Indiana railroad structures were primarily iron; although one "combination" structure existed at Aurora for the Ohio and Mississippi Railroad. Three of the O & M railroad structures were presumably built under the supervision of the Bell Ford contractor, Robert Pattison, O & M road master/contractor between 1868-1871.

It is the "only extant Post patented diagonal "combination" bridge in the United States representing the nineteenth century transitional engineering period between 1840-1896. Today, there are only three iron extant Post trusses in the United States:"

² Seymour Daily Democrat, "Then and Now", September 14, 1886, Col. 3, p. 3.

³ Jackson County Commissioners' Records, May 22, 1858, p. 34 and June 10, 1858, p. 140.

⁴ Original contract of Seymour Bridge Company dated July 23, 1868.

⁵ Brownstown Banner, "Another County Road in State Highway System", October 31, 1934, Col. 2, p. 1.

United States Department of Interior
National Park Service

National Register of Historic Places
Continuation Sheet

Section 8 Page 5

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Statement of Significance

the Atherton (1870, Massachusetts), the Ponakin (1871 Lancaster vicinity Massachusetts), and the Falling Rock (1872 Licking County, Ohio)."⁶ Richard Sanders Allen has identified several highway Post trusses constructed after Bell Ford. One "iron highway structure was built in 1867-1868 at Wheeling, West Virginia by the McNairy, Clafien & Co."⁷ Many "Post" trusses were built upon the Erie railroad and some for the following identified railroad lines: Harlem Railroad, New York Central, Chicago & Alton, Chicago & Northwestern, "Lake Shore and Michigan, and Southern Railroad,"⁸ Ohio and Mississippi Railroad, Indianapolis and St. Louis Railroad, Mobile and Montgomery Railroad, Kansas, Atchison, and Santa Fe Railroad and the Union Pacific Railroad. The latter two rail lines recorded the longest iron Post Patent bridges constructed in the United States and presumably all rail structures are extinct in the United States, although there may be existing structures in Latin America and South America.

The Post" combination" bridge was built as through trusses, open deck, and trestle. Highway structures included the pony truss as exemplified by the Licking County, Ohio Bridge. One of the more interesting "combination" Post truss designs was the "1873 Baring Cross Post Truss bridge built across the Arkansas River"⁹ connecting Little Rock and Argenta, Arkansas. This was a deck wagon and through truss railroad bridge with a pivot span. The deck wagon roadway passed atop the top chords of the railroad bridge. The longest identified highway Post "combination" truss was over the "Connecticut River at Holyoke, Massachusetts spanning the river for 1600 feet."¹⁰ Reportedly, the Post "combination" truss was constructed "out West" more frequently than in the East in the 1870's. Other identified "combination" Post designs were built at "Devil's Gate and Bear River both for the Union Pacific Railroad,"¹¹ "New York & Midland Railroad 1870-1872,"¹² "Central Pacific Railroad over Long Ravine in California,"¹³ "Mobile bridge in Alabama for Mobile and Montgomery Railroad"¹⁴ "Clear Creek Canyon for Colorado Pacific Railroad,"¹⁵ and a highway design at "Cohoes, New York over Mohawk River (1872)."¹⁶

⁶ Letter from Eric Delony to Carter Keith 1995.

⁷ Letter of Cleveland Bridge and Car Works dated February 1, 1868 from Richard Howe Papers, OHS, Box 4, folder 4. Courtesy of David A. Simmons.

⁸ Berg, Walter G. Ed. American Railway Bridges & Buildings. Official reports: Association Railroad Superintendents, Bridges and Buildings. 1898, p. 188.

⁹ Allen, Richard S. "Simeon S. Post's Patent Truss Bridges", The North Jersey Highlander, Ringwood: North Jersey Highlands Historical Society, 1995, p. 21.

¹⁰ The Paterson Daily Press, "The iron Bridge Business," November 29, 1870, Col. 3, p. 3. HAER No. MA-18, 1986, pp. 9-10. Courtesy of Lola Bennett, NPS, HAER documenter for Bell Ford Bridge verified that the Holyoke, Mass. Bridge was constructed.

¹¹ Business papers of L. B. Boomer dated March 1869, Levi O. Leonard papers. Box 5. Courtesy of University of Iowa Libraries Special Collections of Iowa City, Iowa. Further investigations into these papers regarding the Omaha Post truss bridge are available. Other investigations into the UP division records should identify other Post trusses.

¹² Post, Andrew J., "Criticism upon Bridge Designs," American Railway Times, June 1, 1872, p. 170.

¹³ Savage Photo-Central Pacific Railway-California-Long Ravine, No date.

¹⁴ The American Railway Times, from the "Mobile Register" entitled "The Mobile and Montgomery Bridges", March 16, 1872, p. 81.

¹⁵ Miller, Terry "Bell's Ford and the Post Truss," Indiana Covered Bridge Society, Covered Bridge Topics 1968 Photo by George Ball, 1870. Courtesy Colorado Highway Department.

¹⁶ Masten, Arthur H. The History of Cohoes, New York from its earliest settlement to the present. P. 211.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 8 Page 6

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Statement of Significance

Simeon S. Post began his career with Vermont's leading civil engineer, John Johnson; soon associating with Johnson's son Edwin Ferry Johnson in the construction of the Auburn & Syracuse Railroad. Subsequently, both were employed with the New York & Erie Railroad. The development of the Post truss evolved from the practical experience, which Post received through this relationship as chief engineer of transportation probably traceable to the Rider iron bridge disaster. He left the NY & E for the O & M and served as the chief engineer and superintendent actually operating the "first excursion train to Seymour June 29, 1854."¹⁷

He returned east about February 1856 and engaged in railroad construction projects associated with the Erie Railroad until 1859. In 1859, Simeon and his sons, Andrew J. Post and Levi W. Post established a civil engineering firm specializing in iron bridge building at Jersey City, New Jersey concentrating on iron bridge building. Andrew J. Post was trained as a machinist but apprenticed with his father adopting a civil engineering career. He continued with his father until Simeon's death. Andrew continued bridge engineering with the Watson Manufacturing Company of Paterson, New Jersey from 1873-1877. He embarked upon structural engineering for fireproof buildings establishing the firm of Post and McCord of Greenpoint, New York until his death in 1897. He also continued licensing the Post truss in association with Grant Wilkins of the Atlanta Bridge Works of Atlanta, Georgia through the 1880's.

Simeon S. Post patented his iron bridge in 1863. This design was for cast iron joint boxes for iron bridges. Reportedly, the first iron bridge was built upon the Newburgh branch of the New York and Erie Railroad at South Washingtonville, New York in 1865. According to Theodore Cooper, an Erie superintendent in late nineteenth century, this bridge had upright "verticals".

At the conclusion of the Civil War, the Posts', Simeon and Andrew J., Simeon's son established the Atlantic Bridge Works firm in 1866 in New York City with D. C. McCallum, Andra Anderson (McCallum's aide-de-camp). William S. Smith was a western agent at L. B. Boomer's Chicago, Illinois bridge building company. This firm had advertised both an iron and combination Post bridge design promoting both L. B. Boomer and McNairy, Claflen & Co. as licensees of the Post truss. Subsequently, L. B. Boomer did complete the first iron Post patented diagonal bridge "out West" over the Kankakee River at Wilmington, Illinois for the Chicago and Alton Railroad."¹⁸ "McNairy, Claflen & Co. of Cleveland, Ohio provided the components for this bridge to L. B. Boomer."¹⁹ McNairy, Claflen & Co. were successors of Thatcher-Burt bridge company-a successful Ohio bridge building firm of Howe trusses (1851) for highways and railways which they continued to build.

On February, 1868, McNairy, Claflen and Co. issued an advertising letter promoting an "Improved" Post truss. On May 1868, the American Railway Times reported that " S. S. Post's "Improved" combination bridge was tested somewhere around Chicago, Illinois which gave satisfaction."²⁰ Afterward, on September 1, 1868 Patent No. 81,817 Andrew J. Post was issued a patent for an improvement to wooden bridges. This patent is a configuration of Simeon's earlier lower iron chord and a

¹⁷ Vincennes Gazette, August 5, 1854, via Cincinnati Daily Gazette, July 30, 1854 "Excursion on the Ohio and Mississippi Railroad to Seymour", p. unknown.

¹⁸ The American Railway Times, "Iron Bridge over the Kankakee River", January 18, 1868. p. 23.

¹⁹ Letter of Cleveland Bridge and Car Works dated February 1, 1868 from Richard Howe Papers, OHS Box 4, folder 4. Courtesy of David A. Simmons.

²⁰ The American Railway Times, "Post's Combination Bridge," May 16, 1868, p. 158.

**United States Department of Interior
National Park Service**

**National Register of Historic Places
Continuation Sheet**

Section 8 Page 7

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Statement of Significance

wooden upper chord clearly a "combination" bridge design. (Exhibit B)

This patented bridge truss illustrates "the innovations of early Americans, never formally trained as engineers yet contributed to American engineering advancements..."²¹ Prior to 1845, "wooden and iron bridges were built in the same manner as the ancient Roman bridges, in accordance with empirical rules, by practical men who had to depend upon their own resources and natural instincts, experimenting with (different) models and profiting by previous failures. Practice always preceded the science..."²² "Simeon S. Post's patented design incorporated the modular arrangements of iron rods and struts. Like other (successful) patents, this was an improvement of art. Post's arrangements of the components allowed for expansion and contraction of iron so that traffic and temperature changes would not produce injurious effects upon the structure, and in this manner obliterate such bridges."²³

Bell Ford is representative of a later, more scientific era of bridge design. It illustrates the application of nineteenth century scientific engineering theory to bridge design. Referring to a collapsed Post "combination" bridge upon the New Jersey and Midland Railroad, Andrew J. Post, the patentee states "white pine was used in dimensions of Squire Whipple."²⁴

Bell Ford was one of four documented "combination" highway bridges built in Jackson County, but was the first long span built over White River and the only surviving "combination". J. J. Daniels built a wooden Howe truss at Ewing in 1869. The following year another iron "combination" bridge was built over White River at Rockford by D. H. & C. Morrison of Dayton, Ohio; another well-known nineteenth century Ohio bridge building firm. The fourth structure was built in 1883 in Salt Creek by Indianapolis Bridge Company. Bell Ford was the County Commissioners first authorized bridge project across White River. The Indiana General assembly restricted bridges on the river, beginning in 1819, until the railroads reached Indiana.

The transitional period of American bridge engineering began with the introduction of iron rods for upright members in the Howe truss and continued until the introduction of the steel bridge in the 1890's. According to Edwards the "combination" bridge was American technological advancement necessary bridge engineering. "Seven patents were issued by the U. S. Patent Office for "combination" bridges."²⁵ Bell Ford represents this transitional period as the best extant "combination" example of the nineteenth century. Due to its rare patented design and the best representation of the "combination" form Bell Ford is nationally significant. Bell Ford is an extant transitional model of nineteenth century American civil engineers who contributed to America's transportation system utilizing the most economical creation they could devise for the period. Technological advances drove patent bridge designers.

²¹ Petroski, Henry, Engineers of Dreams-Great Bridge Builders and the Spanning of America, New York: Alfred A. Knopf, 1995, pp. 22-65.

²² Cooper, Theodore, "American Railroad Bridges," American Wooden Bridges, New York: ASCE Publication, 1980, p. 5.

²³ Petroski, Henry, Engineers of Dreams-Great Bridge Builders and the Spanning of America, New York: Alfred A. Knopf, 1995, pp. 22-65.

²⁴ Post, Andrew J. "Criticism Upon Bridge Designs," American Railway Times, New York: Haven, June 1, 1872, p. 170.

²⁵ Edwards, Llewellyn, "The Evolution of Early American Bridges," American Wooden Bridges, New York: American Society of Civil Engineers, 1876, p. 137.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 8 Page 8

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Statement of Significance

Economics, heavier locomotives, and the necessity for crossing wider rivers encouraged patented bridge designs. The patented Post Diagonal truss bridge was designed as a railroad structure, addressing lateral movement problems associated with rail transportation. Railroad construction brought knowledgeable early American civil engineers and craftsmen along with a better transportation system, which increased the wealth of the White River Valley. Both John H. Blish and Robert Pattison were such representatives. John H. Blish had relocated from civil engineering on Vermont's Rutland and Burlington railroad locating the Jeffersonville and Indianapolis Railroad. Blish returned to the career stability of a third generation miller, becoming a leading Indiana miller in addition to his railroad pursuits. He served as civil engineer for and president of the Seymour Bridge Company, which built Bell Ford in association with the Jackson County Commissioners.

Robert Pattison was a first generation Irish immigrant carpenter who probably began with the O & M. He became a railroad contractor for the Louisville and Nashville Railroad from Fink's Green River Bridge to Gallatin, Tennessee, returning to the O & M at the beginning of the Civil War as an Ohio and Mississippi road master headquartered at Seymour, Indiana. The roadmaster was responsible for all permanent structures, including bridges for the railroad until 1869. He returned to railroad contracting in 1869 and remained in private business until his death.

The third figure in the construction of Bell Ford was W. L. Hull. He provided the design specifications for the Post truss over White River. "McNairy, Claflin & Co. provided the superstructure."²⁶ Hull had built a "magnificent all iron railroad bridge at Rockford, Indiana for the Jeffersonville and Indianapolis Railroad in 1864."²⁷ He did independent bridge contracting for local governmental units in addition to his railroad employment as bridge superintendent as did most other bridge builders. Further information is sketchy on this individual although he continued bridge construction with various rail lines across the country until after the 1880's.

While the last known "Post bridge was built at Pine Brook, New Jersey in 1905,"²⁸ Bell Ford is the only Post Diagonal "combination" survivor of the nineteenth century patented by Andrew J. Post. In this context, Bell Ford is an extant engineering model of the nineteenth century American civil engineer driven by technological advances, which developed as a result of railroad construction. The selection of the Post "combination" truss for the Bell Ford Bridge was a community's response to community progressiveness, necessity, and economic frugality.

²⁶ Seymour Democrat, December 30, 1868. p. unknown.

²⁷ Seymour Times, October 27, 1864.

²⁸ Allen, Richard S., "Simeon S. Post's Patent Truss Bridges", The New Jersey Highlander. Ringwood, New Jersey Historical Society, 1995, p. 21. Courtesy of North Jersey Highlands Historical Society. Personal Correspondence between Mr. Allen and Fleeta K. Arthur 2003.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 9 Page 9

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Bibliography

Advertisement and Business Letter Record, Office Cleveland Bridge and Car Works, Richard Howe Papers, Ohio Historical Society, Box 4, folder 4. Courtesy of David A. Simmons.

American Railroad Journal. Vol. 7, no. 1-10, no. 53, Vol. 23 no. 1 vo.24, no. 41;Vol. 24, no. 43, no.52 New York: J. H. Schultz. 1853-1856, 1863, 1865, 1867-1868.

American Society of Civil Engineers. January Proceedings. "Simeon S. Post, M. Am. Society of Civil Engineers died June 29th, 1872. Vol. XIX. 1893. p. 49. * Note: 1972 ASCE material contains incorrect information.

Allen, Richard Sanders. Covered Bridges of the Middle West. New York: Bonanza. 1970. Pp.77-78.

Ibid. "Post Diagonal Truss". Covered Bridge Topics. 1995 includes 1863 U. S. Patent design and advertisement. Courtesy of Victor C. Darnell via David A. Simmons.

Ibid op. cit. "Simeon S. Post's Patent Truss Bridges". The New Jersey Highlander. Ringwood: North Jersey Highlands Historical Society. 1995. P. 16- 23. Courtesy of North Jersey Highlands Historical Society.

Baker's Cleveland Directory 1865-1865. Courtesy of David A. Simmons.

Barker, James A. "Inspection Report: Bell Ford Bridge, Jackson County, Indiana". Report submitted to Seymour Heritage Foundation. 1995. Technical information 2003-2004.

Berg, Walter Gilman. American Railway Bridges & Buildings: Official Reports. Official reports Association Railroad Superintendents Bridges and Buildings. Chicago: Roadmaster and Foreman. 1898. 706 pp.

"Biographical Sketch of Hon. Robert Pattison." Seymour Weekly Times. February 26, 1876. Vol. XX. Number 47. p. 6.

Blish, Ed. Sr. Telephone conversation between Fleeta K. Arthur and Marilyn Blish regarding the closing of the Blish Mill. November 8, 2003.

Brant & Fuller Publishers. "Jackson County, Indiana: From the Earliest Time to the Present, with Biographical Sketches, Notes, etc., Together with an Extended History of the Northwest Indiana Territory, and the state of Indiana". Chicago: Brant & Fuller. 1886.

Bushcroit, Robert. "The Coming of the Railroad". New York: Self-published. 1983. Courtesy of Rockland Historical Society.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 9 Page 10

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Bibliography

Census of Dearborn County, Indiana 1850 & 1860

Census of Jackson County, Indiana 1860 & 1870

Census of Hart County, Kentucky 1860 heritagequestonline.com/prod/genealogy/census/index

City Directories of Cincinnati, Ohio 1852, 1853, 1854, 1855

City Directory of Cleveland, Ohio 1863-1865. Courtesy of David A. Simmons.

City Directory of Jersey City, New Jersey 1859-1861. Courtesy of Charlotte Sellers, Jackson County Historian.

Cole, Rev. David, D. D. "History of Rockland County, New York with Biographical Sketches of its prominent men." New York: J. B. Beers & Co. 1884. Courtesy of Rockland County Historical Society.

Commissioners' Records of Jackson County, Indiana Vol. 1 first 100 pages. Vol. 8, 1848 to 1934 as researched and documented by Fleeta K. Arthur January 1998-2001 regarding the building and construction of the Bell Ford Bridge and the Seymour, Courtland (Cortland), Freetown Gravel Road Company 1882-1897, 1967, 1968, 1969, 1970.

Condit, Carl W. American Building Art: The Nineteenth Century, New York: Oxford. 1960.

Contract of Seymour Bridge Company and Robert Pattison dated July 23, 1868 and supporting documentation of the Seymour Bridge Company.

Cooper, James L. Potter's Ford Bridge and the Master Mechanic's Art. Indiana: Self-published. 1996.

Ibid, "A Note On McNairy, Claffen & Co. Bridge Trusses Erected in Indianapolis, Indiana in 1870." December 20, 2003. Presentation for Indiana Historical Society. Indiana: Self-published. Courtesy of James L. Cooper.

Cooper, Theodore. "American Railroad Bridges", American Wooden Bridges. New York: ASCE Publication. 1976.

Davison, A. A. "From the address Delivered at Dedication of The Farmers Club." October 8, 1914. Seymour Times October 8, 1914.

Darnell, Victor C. A Directory of American Bridge-Building Companies 1840-1900. Washington, D. C.: Society of Industrial Archeology. Occasional No. 4, Publication 1984.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 9 Page 11

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Bibliography

Darnell, Victor C. Letter to David A. Simmons dated February 17, 1996 regarding bridge building firm of McNairy, Claflen and Co. of Cleveland, Ohio. Courtesy of David A. Simmons.

Delony, Eric. Landmark American Bridges. New York: Published in association with the American Society of Civil Engineers. Boston: Little, Brown and Co. 1995.

Ibid. Letter addressed to Mr. Carter Keith regarding the Bell Ford Bridge as the only Post "combination" in the United States dated April 30, 1999.

Edwards, Llewellyn N. A Record of History and Evolution of Early American Bridges. Maine:Orono University Press. 1859.

Ibid. "The Evolution of Early American Bridges", American Wooden Bridges. New York: ASCE Publication. 1976

"Excursion on the Ohio and Mississippi Railroad to Seymour." Vincennes Gazette, via Cincinnati Daily Gazette, July 30, 1854.

Gould, George E. Indiana Covered Bridges Thru the Years. Indianapolis: Indiana Covered Bridge Society. 1977. Second Printing.

Harrell, Robert-Seymour resident. Conversation regarding the alterations to Bell Ford during the Indiana State Highway's stewardship. 1999. Mr. Harrell was supervisor for the Seymour district for several years prior to retiring to private transportation engineering.

Haven, John A. and Vose, George L. Eds. American Railway Times. Boston: Haven. 1863, 1865, 1867-1872.

Historic American Engineering Record Document #13 Ponakin bridge in Massachusetts. Courtesy of Patrick Harshbarger.

Hungerford, Edward, Men of Erie: A Story of Human Efforts. New York: Random House. 1946.

Ibid. Letter regarding Post Truss to Fleeta K. Arthur.

Indiana Division of Historic Preservation and Archaeology, and Historic Landmarks Foundation of Indiana Eds. Interim Report: Indiana Historic Sites and Structure Inventory for Jackson County. Indianapolis: Department of Natural Resources. 1988.

Johnson, Crisfield comp. History of Cuyahoga County, Ohio with portraits and biographical sketches of its prominent men and pioneers. Philadelphia: D. W. Ensign. 1879. P. 387.

**United States Department of Interior
National Park Service**

**National Register of Historic Places
Continuation Sheet**

Section 9 Page 12

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Bibliography

Lane, Oscar F. Ed. World Guide to Covered Bridges. The National Society for Preservation of Covered Bridges, Inc. 1972. p. J & 15.

Leonard, Levi papers of. Box 5. "Business papers of L. B. Boomer dated March 1869". Courtesy of University of Iowa Libraries-Special Collections. Iowa City, Iowa.

Loomis & Talbott's City Directory of Cleveland, Ohio 1868. www.heritagequestonline.com/prod/genealogy.

McLean, Alexander. History of Jersey City, N. J.: A Record of its Early Settlement and Corporate Progress: sketches of the towns and cities that were absorbed in the growth of the present municipality: its business, finance, manufactures and form of government, with some notice of the men who built the city. Jersey City: Jersey City Printing Co., 1895, p. 262. www.heritagequestonline.com/prod/genealogy

Mahan, D. H. A Treatise on Civil Engineering Revised with additions ed. by Devolson Wood. New York: J. Wiley & Son. 1873. Pp. 339-344.

Mansfield, E. P. and T. Wrightson Ed. The Railroad Record and Journal of Commerce, Banking, Manufacturers and Statistics. Cincinnati: Wrightson & Co. Vol. 1853-1857, 1862, 1863, 1865, 1867-1872.

Masten, Arthur H. The History of Cohoes, New York, from its earliest settlement to the present. New York: Albany. Junsell publisher. 1877. p. 211. www.cdl.library.cornell.edu/cgi-bin/moa/pageviewer?

Miller, Terry. "Bell's Ford and the Post Truss." Indiana Covered Bridge Topics. Indianapolis: Indiana Covered Bridge Society. January 1968. p. 1. Courtesy of John Sechrist

New York highway Post "combination" truss bridge photo. Courtesy of Jim Cooper.

Noblitt, Loren M. Composite History of Jackson County. Vol. 2 Indiana: Turner. 1991.

Obit of "Andrew J. Post." New York Times. March 12, 1896. Jersey City News Items. P. unknown.

Obit of Andrew J. Post. Iron Age. 1896. Vol. 57. p.707. Courtesy of Ms. Green, Digital Image Archivist via phone call to Fleeta K. Arthur January 2003. Linda Hall Library of Science, Engineering and Technology. University of Missouri: Kansas City.

Obit of "Col. Robert Pattison." Evansville Courier. May 1, 1885. p. 4.

United States Department of Interior
National Park Service

National Register of Historic Places
Continuation Sheet

Section 9 Page 13

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Bibliography

Opening of railroad from Cincinnati, Ohio to Seymour, Indiana. Broadside. Cincinnati Daily Times. June 29, 1854.

Petroski, Henry. Engineers of Dreams-Great Bridge Builders and the Spanning of America New York: Alfred A. Knopf. 1995.

Post, Andrew J. "Criticism upon Bridge Designs". American Railway Times. Ed. by John A. Haven. Mass. Boston. June 1, 1872.

Savage bridge photo. Long Ravine, California. Central Pacific Railroad Museum. No date. cpr.org/Museum?Archive?-97709017_nr.html.

Sechrist, John. Telephone conversation regarding Indiana Covered Bridges. November 7, 2003.

Simmons, David A. "The World's Only Post Truss Covered Bridge" Bridges and Byways, Journal of the Ohio Historic Bridge Association. Vol. XI. No. 3. Summer 1999.

Ibid. Op. cit. HAER: Ma. -17, OH. 89 Report of Falling Rock Boy Scout Camp McNairy, composite cast-wrought iron bridge. HAER. www/memory.loc.gov/cgi-bin/ammppage?co.

Simmons, Richard & Francis H. Parker. Railroad's of Indiana. Bloomington: Indiana University Press. 1997. p. 239.

Smith, Robert F. From the Ohio to Mississippi. Cincinnati: Mt. Airy Printing and Lithographing Co. 1965.

Taber, Thomas T. 111, Adm. Railroad Historical Center, Muncy, Pa. Various correspondences between Mr. Taber and Fleeta K. Arthur regarding various rail lines and railroad organization. 2002-2003.

Trow's Business Directory for New York City. 1860-1866, 1880-81. www/heritagequestonline.com/prod/genealogy

Tyrell, Henry. History of Bridge Engineering. Self-published. 1911.

U. S. Patent Office. Simeon S. Post "Iron Bridge" Patent no. 38,910 June 16, 1863.

U. S. Patent Office. Andrew J. Post "Truss Bridge Improvement" Patent no. 81,817 September 1, 1868.

U. S. Patent Office. H. M. Claflin "Improved Mode of Splicing Timbers." Patent no. 47,395 April 25, 1865.

Weitzman, David. Traces of the Past: A Guide to Industrial Archaeology. New York: Charles Scriber's & Sons, 1980.

Wheeler, J. B. An Elementary Course of Civil Engineering for use of Cadets of the United States Military Academy. New York: John Wiley & Sons. 1876. pp. 363-364.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 9 Page 14

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Bibliography

White, John H. Historian Miami University, Oxford, Ohio regarding the Wason Manufacturing Company 2003.

Williams Ohio State Directory. 1866-1868. Courtesy of David A. Simmons.

Microfilm of the following newspapers:

Aurora Independent, (IN) 1853, 1854, 1863, 1865, 1867, 1869 Courtesy of Indiana State Library

Brownstown Banner (IN) 1870, 1874, 1876, 1882-1887, 1890-1896, 1941, 1967, 1969, 1970

Cincinnati Gazette (Ohio) 1853, 1854, 1865

Cincinnati Daily Times (Ohio) 1854

Cleveland Daily Leader (Ohio) 1866-1867

Cleveland Herald (Ohio) 1866

Cleveland Monitor (Ohio) 1865-1866

Dearborn Independent (IN) 1868, 1869

Evansville Daily Courier (IN) 1885

Indianapolis Daily Sentinel (IN) 1869, 1870

Jackson County Democrat (IN) April 1854-April 1855

Madison Daily Times (IN) 1852, 1853 Courtesy of Indiana State Library

Missouri Democrat (Missouri) 1867-March 1868 Missouri Historical Society

Rockford Herald (IN) February 16, 1856-July 10, 1857

Seymour Weekly Democrat (IN) 1868

Seymour Times (IN) 1862-1874, 1876, 1882-1888, 1896, 1967, 1969, 1970

Seymour Weekly Times (IN) dated February 26, 1876 ed. J. R. Monroe original copy owned by Fleeta K. Arthur

The Paterson Daily Press (NJ) November 1867-1872 Courtesy of New Jersey State Archives

Vincennes Gazette (IN) 1854, 1857, 1869-1870 courtesy of Indiana State Library

All Indiana microfilmed newspapers Courtesy of Indiana Historical Society Newspaper Project.

United States Department of Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section 10 Page 15

Bell Ford Post Patented Diagonal "Combination" Bridge, Jackson County, Indiana

Verbal Boundary Description

An area of Hamilton Township and Jackson Township, Jackson County, Indiana centered on the above UTM point including the right of way of Bell Ford Covered Bridge, its superstructure, west abutment and wingwall; and east and west piers in White River. On West bank of White River, in a rectangle of ten feet (10) feet behind the wingwall and abutment: also include 30 feet of right-of-way. Include one hundred eleven feet of approaching right-of-way from the Bell Ford Bridge to the East side of White River.

Boundary Justification

The boundary will include the existing Post Diagonal "Combination" span and piers, the site of the restored collapsed span with the historic stone abutment and center pier, and the reestablishment of eastern and western roadway approaches to the Bell Ford Bridge.

UNITED STATES PATENT OFFICE.

SIMEON S. POST, OF JERSEY CITY, NEW JERSEY.

IMPROVEMENT IN IRON BRIDGES.

Specification forming part of Letters Patent No. 28,919, dated June 16, 1863.

To all whom it may concern:

Be it known that I, S. S. POST, of Jersey City, county of Hudson, State of New Jersey, have invented a new and improved Method of Constructing Iron Bridges; and I do hereby declare that the following is a full and exact description thereof, reference being had to the accompanying drawings and the letters of reference marked thereon.

The nature of my invention consists in constructing an iron bridge in such a manner as that the expansion and contraction of the material will not produce injurious effects upon the structure, and in this manner obviating one of the most serious objections to the universal use of such bridges.

To enable others skilled in the art to make and use my invention, I will proceed to describe its construction more minutely.

Figure 1 shows a side elevation of two panels of one end of a truss or girder. Fig. 2 shows a plan of the chord and its attachments. Fig. 3 shows an end view of a post with the attachment of the chord and top plate. Fig. 4 shows a side view of a post. Fig. 5 shows a plan of the upper plate or chord used by me. I fasten the pedestal A by means of suitable bolts to the masonry or proper abutment, which pedestal is made to receive the end post of the bridge, which post is rounded at the bottom, as shown at B, and held in the pedestal (which has a lip, C) by the bolt D, passing through both the pedestal and the slot E in the chord F, to which chord I attach the brace G, which is fastened with the strut or post H to the top chord or plate, J, by means

of a bolt, K, passing through the joint box L, as shown in Fig. 3, E. The joint-box is used for the purpose of connecting the sections of the top chord or plate in such a manner that by passing the bolt K through the struts and braces will allow both to revolve upon said bolt to an extent corresponding to the degree of the expansion or contraction. The joint-box may be placed upon the struts, and the braces G and K may be introduced, as shown in Fig. 3, at H, and the bolt K passed through, as shown in Fig. 1 at P, after which the sections of the plate or upper chord may be attached to the box by bolts as in.

Having thus described my invention, what I claim, and for which I desire to secure Letters Patent, is—

1. The joint-box connecting segments of the top chord or plate, and also receiving the heads of the posts or struts and braces, with the knees J, K passing through the whole.
2. A cylindrical joint in the construction of a bridge, as shown at H, irrespective of its location, when used for the purpose of obviating the dangers of expansion and contraction.
3. The slotted chord, when used in connection with the cylindrical joint and for the same purposes.
4. The construction of the chord, when used in combination with the cylindrical joint, substantially as described and shown.

S. S. POST.

Witnesses:

ANDREW J. POST,
O. A. STEVENS.

S. S. Post.
Iron Bridge.
No. 38910. Patented June 16, 1863.

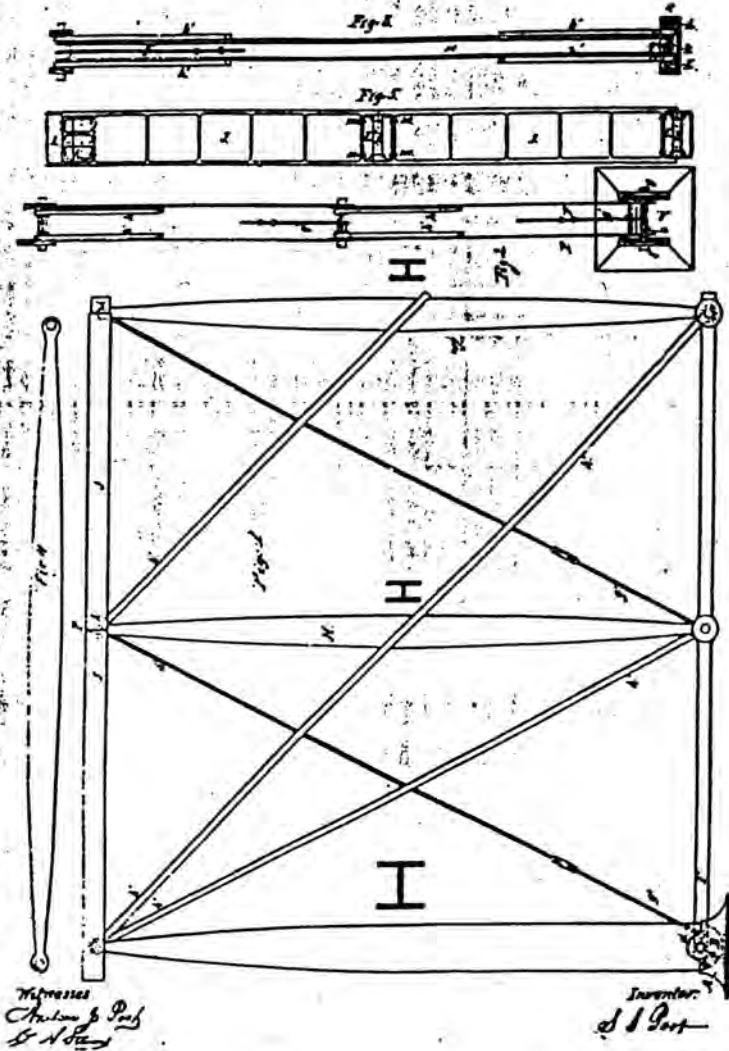


Exhibit A

UNITED STATES PATENT OFFICE.

ANDREW J. POST, OF HUDSON CITY, NEW JERSEY.

IMPROVEMENT IN BRIDGES.

Specification forming part of Letters Patent No. 81,817, dated September 1, 1908.

To all whom it may concern:

Be it known that I, ANDREW J. POST, of the city of Hudson, county of Hudson and State of New Jersey, have invented certain new and useful Improvements in the Construction of Bridges; and I do hereby declare that the following is a full and exact description thereof.

My invention is an improvement in wooden bridges. It appears to the variation of what are known as truss-bridges. Its object is to fortify the wood against crushing strains at the ends of the several pieces, and to form suitable places for the reception of the several struts.

I will first describe what I consider the best means of carrying out my invention, and will afterward designate the points which I believe to be new.

The accompanying drawings form a part of the specification.

Figure 1 is a plan view of part of a bridge. Fig. 2 is a side elevation thereof, partly in section. Fig. 3 is a horizontal section, or rather a top view, of the iron-work which is at and near the base of the bridge. Fig. 4 is a cross-section looking toward the end, and Fig. 5 is a cross-section looking toward the middle of the bridge.

The figures show one side or truss. Fig. 5 shows also a portion of the cross-timber or flooring. It will be understood that two or more of such trusses are laid parallel, and suitably connected across in any approved manner to complete a bridge; also, that the ends are supported upon abutments or piers in any approved style.

Similar letters of reference indicate like parts in all the figures.

A A are the short-timbers, B B are the uprights, sometimes designated "struts," O D, &c., are braces, and e d, &c., are nuts. M is a casting, formed, as represented, with flanges m. The strut B is received in a hollow in the lower part of the casting M, as indicated by strong lines in Figs. 2, 4, and 5. The brace O D, &c., are received in corresponding holes provided therein, and fair bearings are provided for the nuts e d on the upper surface. The ends of the timbers A A are cut to match the flanges m, and bear against the sides of the casting M and also

against the edges of the flanges m. In putting the parts together, the flanges m support the weight of the timbers a a. All the beam of the strut B is a hollow cast-iron shoe, formed as indicated by H. The base of the strut is received in the hollow interior of the shoe, as indicated by dotted lines. The several braces, that, &c., are connected to the cross-beam a, which traverses the base of the casting M, as represented.

In subjecting wood to strain, it is very important to preserve it from a crushing strain acrosswise of the fibres, and to allow the fibres to bear fairly with their ends against the surfaces at right angles thereto. My invention not only provides for this very important, but also provides, by the flanges m, for supporting the timber of the upper chord, and keeping the wood in the same line with the wood in being applied together. My shoe M serves the same purpose, and provides a better bearing for the braces, tension-chords, &c., than is afforded by the ordinary arrangement.

It will be understood that my castings can be casted or otherwise produced in any approved manner against oxidation or other injury, and that the wood may be prepared to resist decay or to resist action of air and moisture by any of the ordinary means, either at the points of contact with the casting or throughout its whole extent.

The hollow rounded ends provided for the top of each strut A allows it to roll therein, in order to prevent warping and twisting of the wood. The flanges m support the weight of the short-timbers while putting the parts together, and during all adjustments, without withdrawing from the fair and bearing afforded for the short-timbers. No part of any timber is crushed transversely. The several braces are accessible and adjustable with ease, and any brace or tie, or also any strut, short-timber, or floor-timber, may be easily taken out and replaced or another substituted.


These important qualities are not combined, and cannot be to the same degree in any other construction known to me.

Having now fully described my invention, what I claim, and desire to secure by Letters Patent, is as follows:

The castings M, fitted in the top chord,

A. J. Post
Truss Bridge.

No. 81,817 Patented Sept 1, 1908.

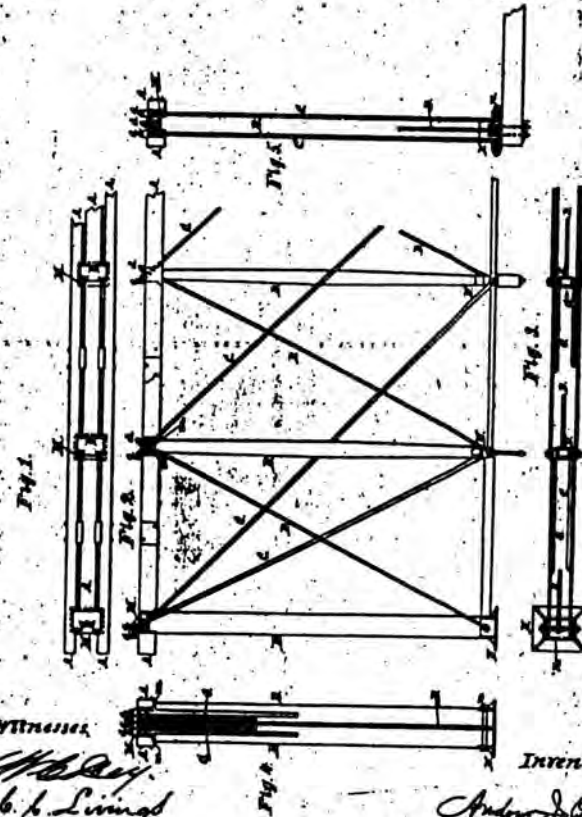

Witnesses
W. C. Dey
C. C. Livings

Inventor
Andrew J. Post

81,817

as specified, and extending up to the upper surface thereof, having inclined surfaces forming fair bearings for the nuts on the diagonals, and recesses at the base adapted to receive the round ends of the struts B, all constructed, combined, and arranged substantially as and for the purposes herein set forth.

In testimony whereof I have hereunto set my name in presence of two subscribing witnesses.
ANDREW J. POST.
Witnesses:
W. C. DEY,
C. C. LIVINGS.

Bell Ford Post Diagonal "Combination" Bridge
Jackson Co. Indiana

12

Ohio & Mississippi Railroad Company,

Sumner Station, Jan 12th 1869

R. Pattison Please pay J.B. Shields twenty five
dollars to be credited on freight bill of M. W. Clafflin
+ co

Jno Keaton Agt

Exhibit C

President. Vice President.
 Jno. Cronk. H. T. Clapham,
 Secretary. Superintendent.
 Simon Stribos, Engineer.


Highway Bridge, Crawfordsville Road, Indianapolis, Indiana.
 Highway Bridge, Kentucky Ave., Indianapolis, Ind.
 Indianapolis & St. Louis R'y, over White River.
 Vincennes Bridge, over Wabash River, O. & M. R'y.
 O. & M. R'y, Jeffersonville Branch, over Big Creek.
 O. & M. R'y, Jeffersonville Branch, over Muscatatuck River.
 Carlyle Bridge, over Kaskaskia River, O. & M. R'y.
 Lawrenceville Bridge, over Embarras River, O. & M. Railway.
 Sholes Bridge, over White River, O. & M. Railway.
 Aurora Bridge, Aurora, Ind., O. & M. Railway.
 O. & M. Railway Bridge, over Hogan River.

The Subject on this Card is Underlined.

THOS. T. SWEENEY,
 Landscape and Mechanical Photographer,
 No. 200 Superior Street, Cleveland, O.

Description
 The Highway Bridge, Kentucky Ave., Indianapolis, Ind. Indiana. (Thos. T. Sweeney Landscape and Mechanical Photographer) The McNiry & Claffen Manufacturing Company, Cleveland Bridge and Car Works, Cleveland, Ohio. On back of stereoview list of bridges (1) Highway Bridge, Crawfordsville Road, Indianapolis, Indiana (2) Highway Bridge, Kentucky Ave., Indianapolis, Ind. (3) Indianapolis & St. Louis R'y., over White River (4) Vincennes Bridge, over Wabash River, O. & M. R'y. (5) O. & M. R'y., Jeffersonville Branch over Big Creek. (6) O. & M. R'y., Jeffersonville Branch, over Muscatatuck River. (7) Carlyle Bridge, over Kaskaskia River, O. & M. R'y. (8) Lawrenceville Bridge, over Embarras River, O. & M. Railway. (9) Sholes Bridge, over White River, O. & M. Railway. (10) Aurora Bridge, Aurora, Ind. O. & M. Railroad. (11) O. & M. Railway Bridge, over Hogan River. Of interest also to Railways, railroads & railroad, Trains, cast and wrought iron bridges, advertising on back of stereo or stereos. Add \$2.00 to ship. Condition very good with small mark center by edge on left image and scratch on left image and corner wear to mount.

On Wed Jul 16 20:12:54 PDT 2003, seller added the following information:

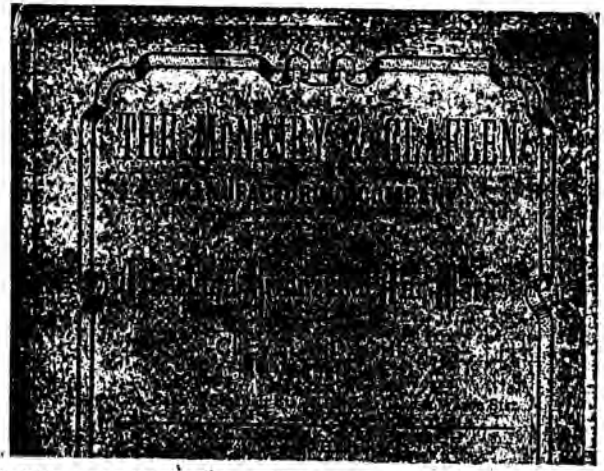

<http://api.hey.com/v1/obj/SAPL61TYViewCard.htm?3231973325>

Bell Ford Post Diagonal "Combination" Bridge Jackson Co., Ind.



<http://api.hey.com/v1/obj/SAPL61TYViewCard.htm?3231973325>

Exhibit D

UNITED STATES PATENT OFFICE.

H. M. OLAFLEN, OF CLEVELAND, OHIO.

IMPROVED MODE OF SPLICING TIMBERS.

Specification forming part of Letters Patent No. 47,395, dated April 25, 1865.

To all whom it may concern:

Be it known that I, H. M. OLAFLEN, of Cleveland, in the county of Cuyahoga and State of Ohio, have invented certain new and useful Improvements in Splicing Timber for Bridges, Roofs, &c.; and I do hereby declare that the following is a full and complete description of the same, reference being had to the accompanying drawings, making a part of this specification, in which—

Figure 1 is a perspective view of a section of a chord of a bridge. Fig. 2 is a longitudinal section. Figs. 3, 4, 5, and 6 are detached sections that will be referred to in the description.

Like letters of reference indicate like parts in the different views.

My improvement relates to the mode of joining or splicing timbers together, whereby the fiber of the wood is not injured or its strength impaired, making a safe and secure splice for any wood structure.

Fig. 1, representing a section of a chord of a bridge, shows the timbers as they are secured together with my improvement, the manner of which is clearly represented in the other figures, together with Fig. 1, and will be described as follows:

Fig. 2 is a section of timbers A and B of a chord. The timbers B are joined or spliced at B'. C is a link, formed at the ends into heads a, represented detached from the timbers in Fig. 3. The link fits into a groove in the timber A and the heads fit into depressions in the timbers B, clasping round under one edge of the plates C', which are secured on the timbers, as will be described. A perspective view of both sides of these plates is shown in Figs. 4 and 5. b represents a groove on one side in which the link C fits, and the sides or flanges b' of the plate extend up on both sides of the link, as shown and indicated by the dotted lines in Fig. 3. The plate can be solid or recessed out, as at e, and there can be openings d for the bolts to pass through. On the other side of the plate are knobs e, that fit into the timbers so that the face of the plate is flush with the surface of the timber, as shown in Fig. 2. The knobs are some distance apart, and may or

may not be placed alternately with each other, so that the fiber or grain of the wood is not broken in any way to injure or weaken the structure, for, as the knobs may be so placed in relation to each other that there need be no two of them in a direct line, and the grain of the wood between the knobs across the timbers being entire, it is found by practical tests that the timber is not at all weakened by the use of these plates. Instead of these knobbed ribbed plates may be used, as represented in Figs. 1 and 6, H being the plate and M the ribs projecting on each side; but the objection to this plate is that there has to be a groove entirely across the timber, which cuts the fiber off so as to materially weaken the structure, and, the strength of each timber being thus diminished, greatly impairs the strength of the chord.

When timbers are joined together, as at B', the knobbed plates C' fastened on the timbers, and the link C or its equivalent in place, there is a key, g, (seen in Figs. 2 and 3,) driven in at one end or head of the link on one side of the plate, which draws the timbers B still closer together and holds them more firm and securely in place.

In place of the link C one or more rods may be used and connected to the knobbed plates by screws, so arranged that by turning the rods the plates and timbers will be secured together.

G are bolt-heads; the bolts extending entirely through the section of timbers and plates, securing the structure together.

In some cases a knobbed plate may be used without the link by making the plate of sufficient length so as to lap over or extend across the joint of the timbers.

What I claim as my improvement, and desire to secure by Letters Patent, is—

1. The knobbed plates C', as and for the purpose set forth.

2. The knobbed plates C', in combination with the link C, or its equivalent, substantially as and applied to the purpose specified.

H. M. OLAFLEN.

Witnesses:

W. H. BURRIDGE,
J. HOLMES.

H. M. Claflin,

Splice for Timber.

No 47,395.

Patented Apr. 25, 1865.

Fig. 1.

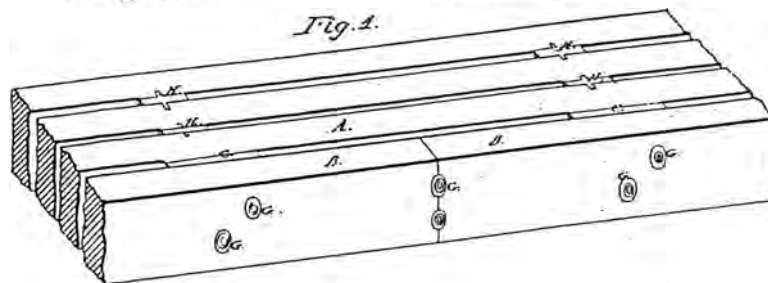


Fig. 2.




Fig. 3.




Fig. 4.




Fig. 5.



Witnesses:

W. H. Burridge
J. Holmes

Inventor:

H. M. Claflin

W. H. BURRIDGE, J. HOLMES, & C.

Bell Ford Post Diagonal "Combination" Bridge

Jackson County, Indiana



Bell Ford Bridge
Jackson Co., Indiana

Angie Krieger

1998

Jackson Co. Park & Recreation

Exterior View - West End of Bridge to EAST span

South of Bridge

#1.



Bell Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

Jackson Co. Park & Recreation
Exterior view - East to West - long view

#2.



Bell Ford Bridge

JACKSON Co. INDIANA

Angie Krieger

1998

JACKSON Co. PARK & RECREATION

Interiore view - East spar with cabling spanning two panels.

#3



Bell Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

Jackson Co. Parks Recreation
Interior View West Span to East Span
System of Post Diagonal truss inclined toward mid section of span

#4.



Bell Ford Bridge
Jackson Co. Indiana

Angie Krieger

1998

Jackson Co. Park & Recreation

Interior view - Joint system of upper chord. Note wooden lateral
bracing of upper chord.

#5.



Bell Ford Bridge

Jackson Co. Indiana

Angie Krieger

1978

Jackson Co Park & Recreation

Interior View - Wheel guard railing, Lower chord, Floor beam, Floor

#6.



Bell Ford Bridge
JACKSON Co. Indiana
MARCIA Walker

1999
Jackson Co. Parks & Recreation
MARKING lower chord for Salvage - Western Span

#7



Bell Ford Bridge
Jackson Co Indiana
MARCIA WALKER
1999

JACKSON Co. Park & Recreation
Exterior view looking West to East
Remaining Eastspan


#7A



Roll Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

Jackson Co. Parks Reception
Center pier looking West from South side of bridge

#8.

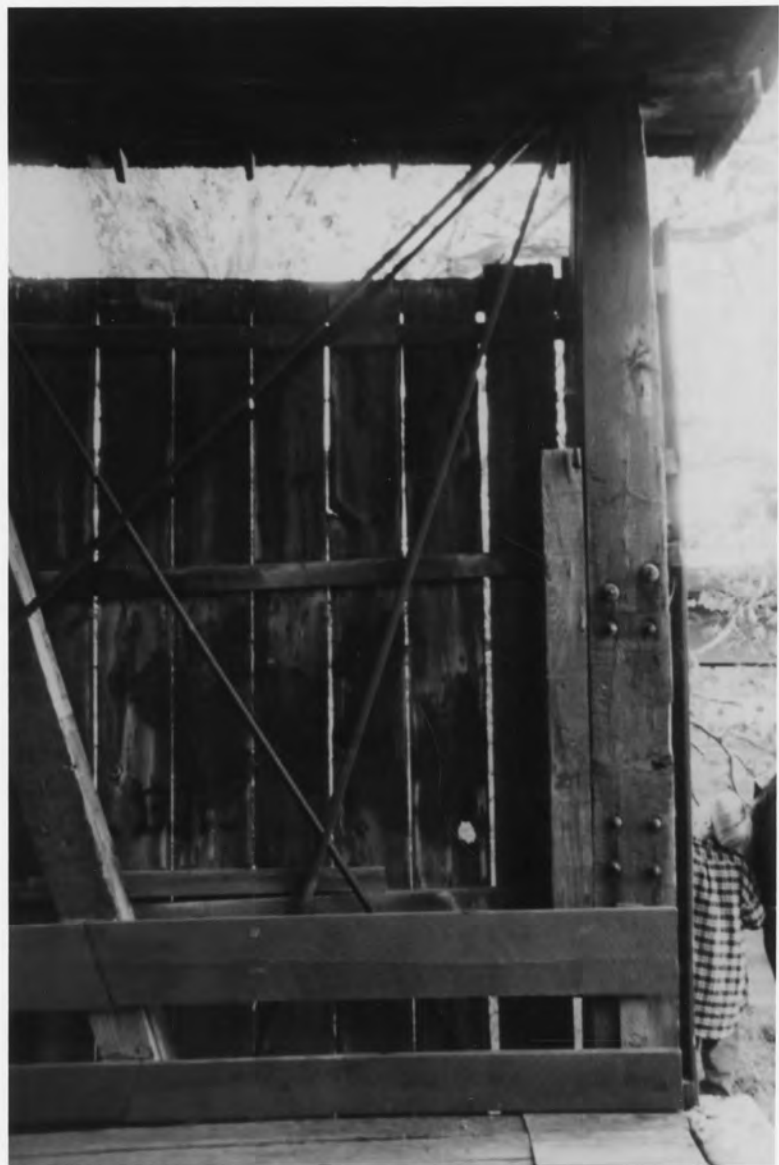

Bell Ford Bridge
Jackson Co. Indiana
J.A. BarKee
1995

Jackson Co. Park & Recreation

West End of Bridge. Notice lack of overhang.

ARRANGEMENT of timbers and rods in a Post Diagonal truss

#9.



Bell Ford Bridge
Jackson Co., Indiana
Angie Krieger
1998

Jackson Co. Park & Recreation
Exterior View - Roof line

#10.



Bell Ford Bridge
Jackson Co. Indiana
Angie Kiegee

1998
Jackson Co Park & Recreation
Exterior - Closeup of ends

#11



Bell Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

Jackson Co. Park & Recreation
EAST End. Failed Knee-braces. These prevent the present lean
#12.



Bell Ford Bridge
Jackson Co. Indiana

MARCIA WALKER

1999

Jackson Co. Park & Recreation

lower chord - cast shoe & wrought iron

#13



Bell Ford Bridge
Jackson Co. Indiana
MARCIA WALKER
1999

Jackson Co. Park & Recreation

Lower Chord Assembly - Notice that assembly has different
number of components as we move toward abutment. At abutment
A complex strap assembly exists. Looking West from Western span.

#14



Bell Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

Jackson Co. Park & Recreation
Exterior - Full view - South East
#15.



Bell Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

Jackson Co. Parks & Recreation

Exterior View - Looking West - End of Floor Beam.
Sheet metal shield covering connection pin (not shown)
Single vertical bolt supports end of floor beam.

#16



Bell Ford Bridge
Jackson Co. Indiana
Angie Krieger
1998

JACKSON Co. Park & Recreation
Looking East through bridge from West span - notice direction of inclined
strut members.

#17.



Bell Ford Bridge
Jackson Co. Indiana

Annie Kielegar

1998
Jackson Co. Park & Recreation

Looking West from EAST SPAN - Notice midsection wooden strut assembly

#18



Bell Ford Bridge

Jackson Co. Indiana

Angie Krieger

1958

Jackson Co Park & Recreation

Looking East at Pier. Notice lower lateral bracing
uses iron tension rods with floorbeams acting as struts
19.



Bell Ford Bridge
Jackson Co. Indiana
Annie Krieger
1998

Jackson Co. Parks & Recreation

Exterior view - Notice lower lateral bracing uses iron tension rods
with floor beams acting as struts.

Connection pin uncovered of joint system.

#20.



Bell Ford Bridge
Jackson Co. Indiana

J.A. Barker

1995

Jackson Co. Park & Recreation

lower chord connection. Inside view

Notice wooden vertical timber shared to fit cast shoe

#21



Bell Ford Bridge
Jackson Co. Indiana
J.A. Barker
1995

Jackson Co. Park & Recreation
Interior view of lean, looking EAST
RIGHT Knee brace pulled loose
Butted top chord strut members

#22.



Bell Ford Bridge
Jackson Co. Indiana
Marcia Walker

1999
Jackson Co. Park & Recreation
Lower chord, cast shoe, & wrought iron joint system

#23.



JOINT
16


Bell Ford
Jackson Co. Indiana
Marcia Walker
1999

Jackson Co. Parks & Recreation
Top Chord Joint w/ wooden strut X bracing




#24.

Bell Ford Covered Bridge

10
4314160
5912750 592750E

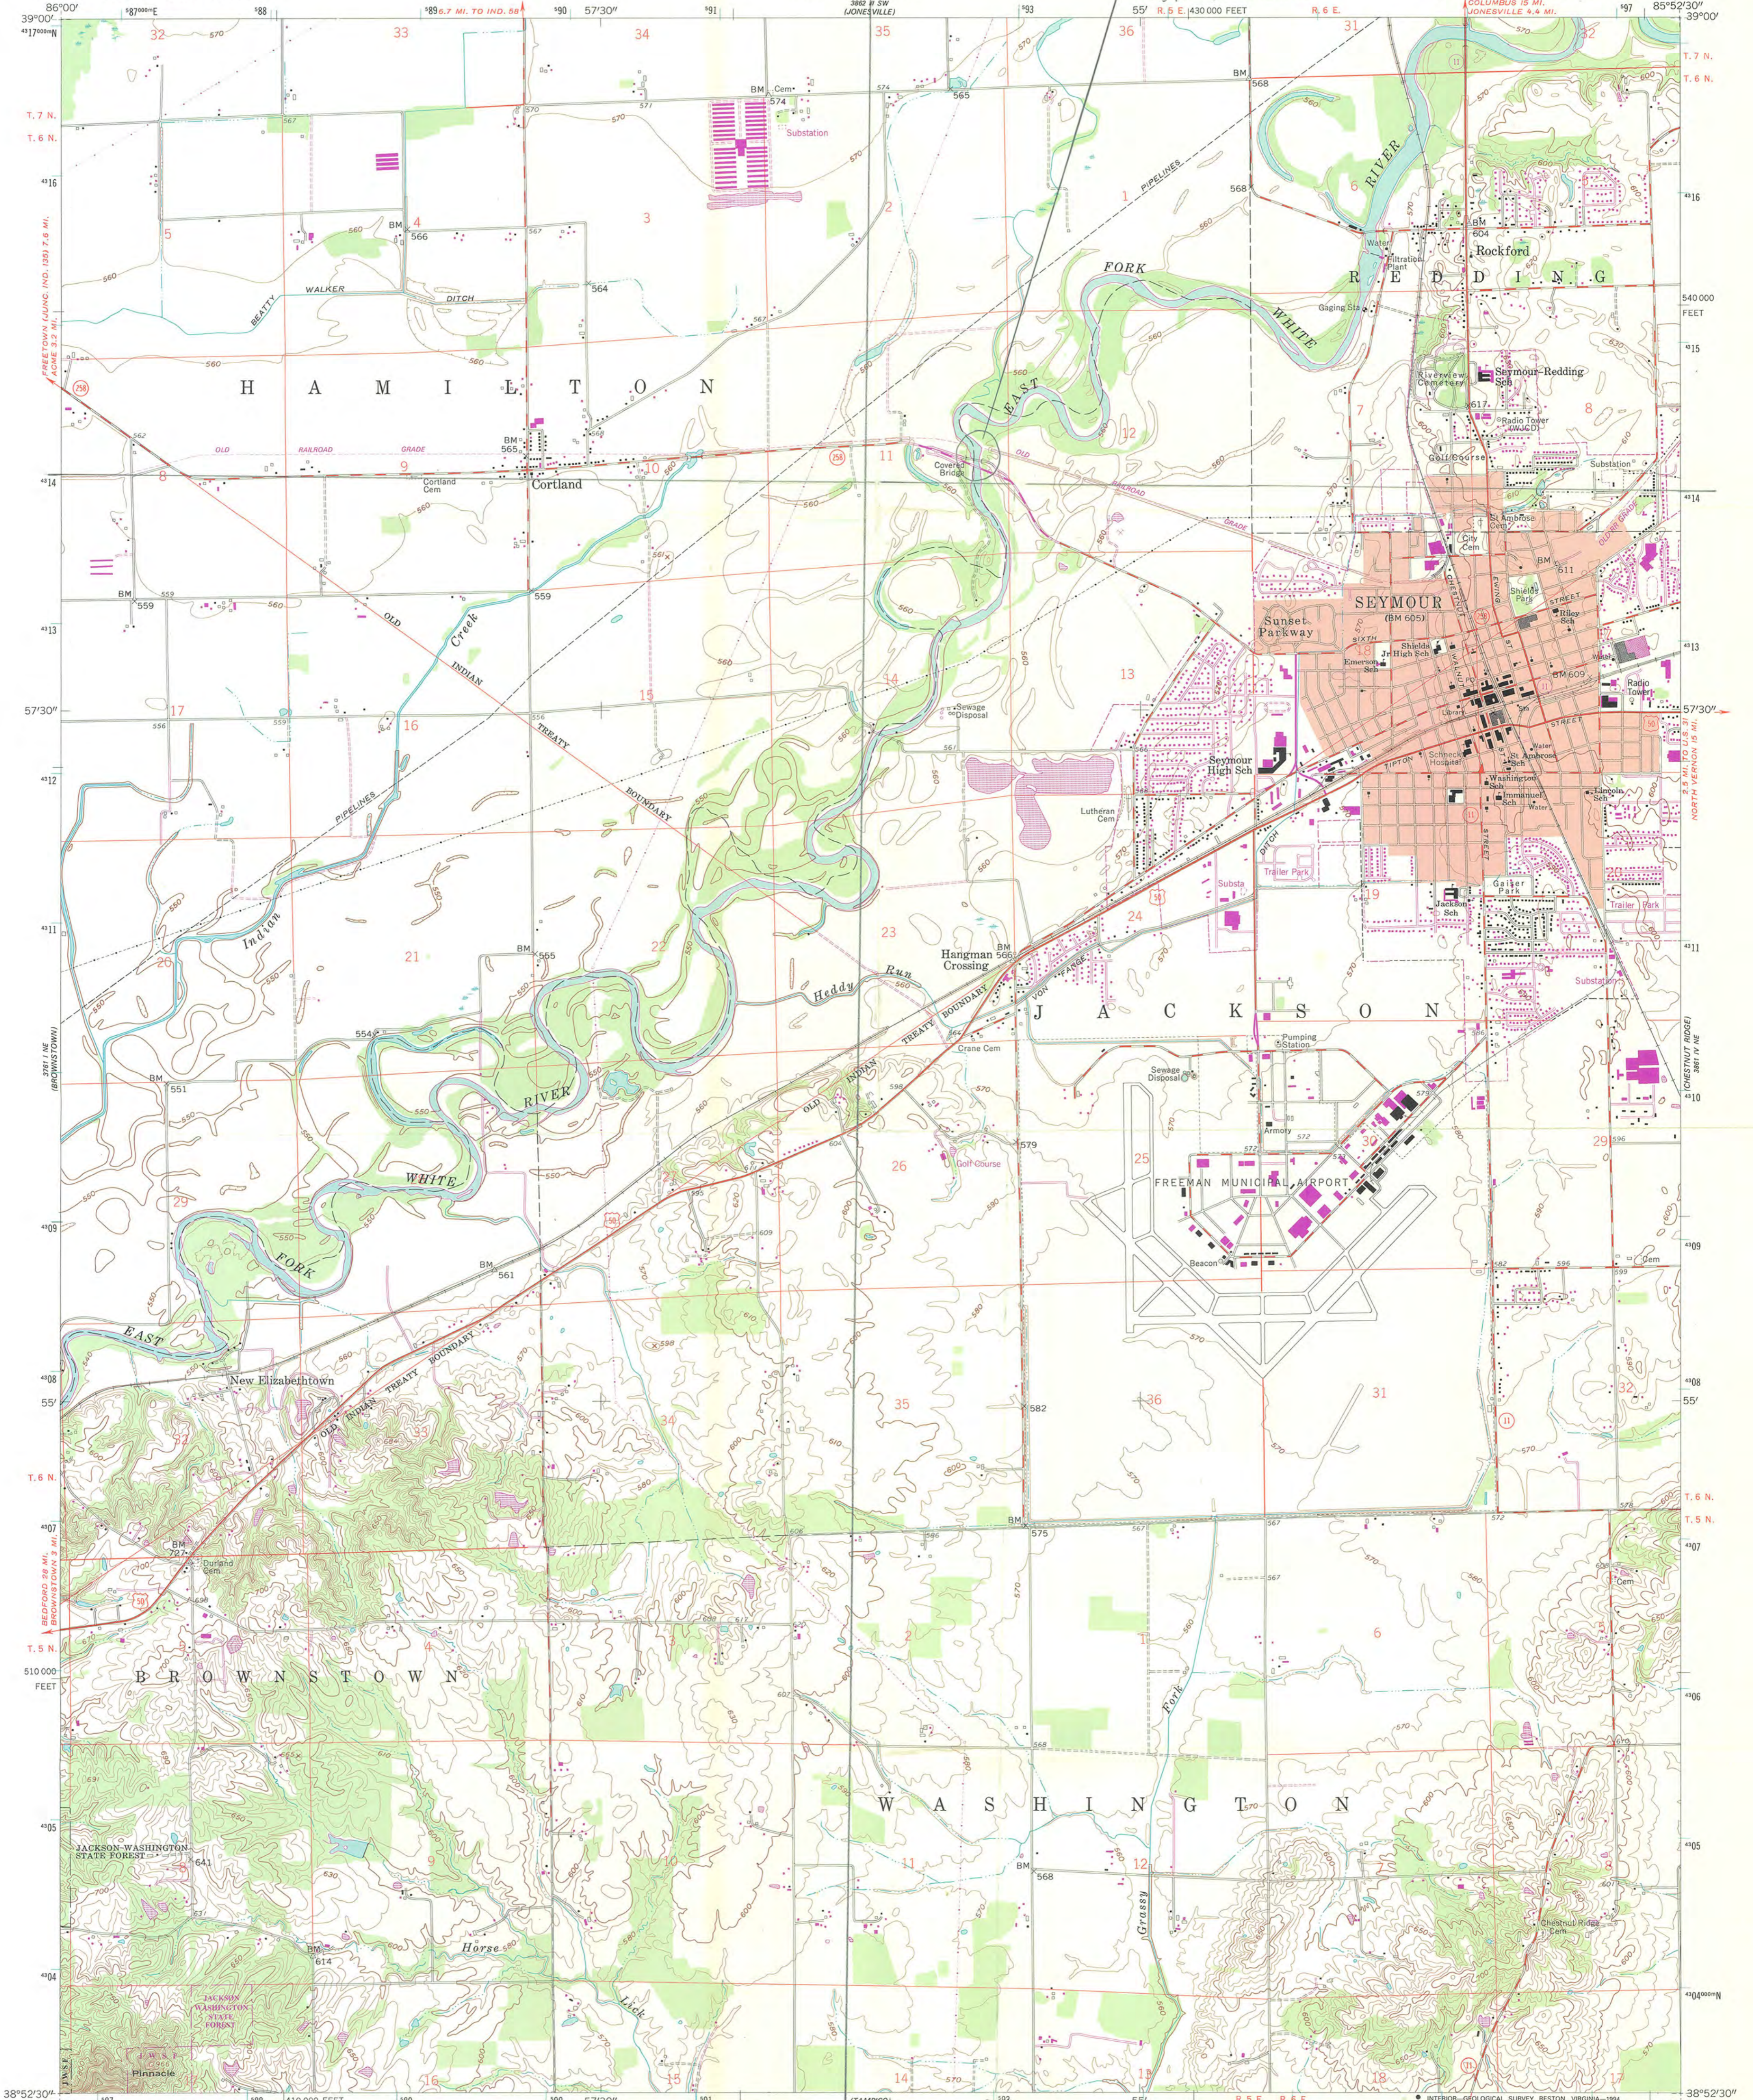

Produced by the U. S. Geological Survey
Control by USGS, NOS/NOAA, and USCE
Topography by photogrammetric methods from aerial photographs taken 1956 and 1957. Field checked 1958
Projection and 10,000-foot grid ticks: Indiana coordinate system, east zone (transverse Mercator)
1000-meter Universal Transverse Mercator grid ticks, zone 16, shown in blue 1927 North American Datum (NAD 27)
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks
The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are given in USGS Bulletin 1875
There may be private inholdings within the boundaries of the National or State reservations shown on this map
Red tint indicates areas in which only landmark buildings are shown
Photinspected from 1992 source; no major culture or drainage changes observed. Boundaries revised and names verified 1994

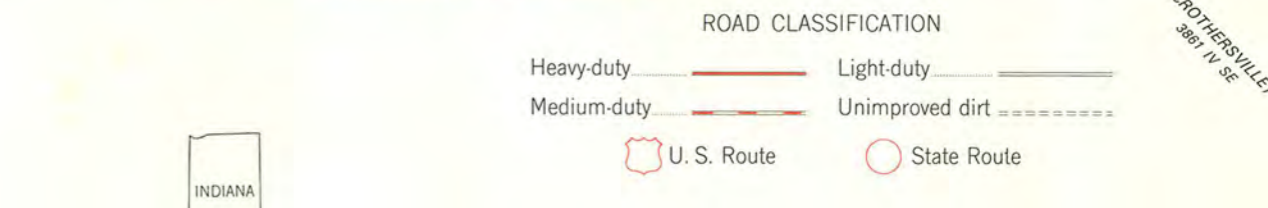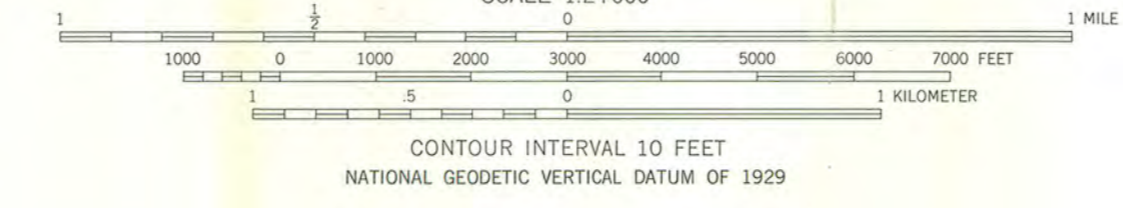

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225 OR RESTON, VIRGINIA 22092,
AND INDIANA DEPARTMENT OF NATURAL RESOURCES, INDIANAPOLIS, INDIANA 46204
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

Revisions shown in purple and woodland compiled in cooperation with State of Indiana agencies from aerial photographs taken 1984 and other sources. This information not field checked
Map edited 1988

SEYMOUR, IND.
38085-H8-TF-024
1958
PHOTOREVISED 1988
MINOR REVISION 1994
DMA 3861 IV NW—SERIES V851

DNR

Indiana Department of Natural Resources

Division of Historic Preservation & Archaeology • 402 W. Washington Street, W274 • Indianapolis, IN 46204-2739
Phone 317-232-1646 • Fax 317-232-0693 • dhpa@dnr.in.gov



February 2, 2005

Carol D. Shull
Keeper of the National Register
National Park Service 2280
National Register of Historic Places
1201 "I" (Eye) Street, N.W.
Washington D.C. 20005

Dear Ms. Shull:

Enclosed is a National Register of Historic Places nomination for the Bell Ford Post Patented Diagonal Combination Bridge located in Jackson County, Indiana.

The Indiana Historic Preservation Review Board reviewed the nomination and voted to recommend its inclusion in the National Register of Historic Places.

Very truly yours,

Jon C. Smith
Director
Division of Historic Preservation
and Archaeology

JCS:AEW:aw

Enclosure: nomination package

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES
EVALUATION/RETURN SHEET

REQUESTED ACTION: NOMINATION

PROPERTY NAME: Bell Ford Post Patented Diagonal "Combination Bridge"

MULTIPLE NAME:

STATE & COUNTY: INDIANA, Jackson

DATE RECEIVED: 2/11/05 DATE OF PENDING LIST: 3/10/05
DATE OF 16TH DAY: 3/25/05 DATE OF 45TH DAY: 3/27/05
DATE OF WEEKLY LIST:

REFERENCE NUMBER: 05000194

REASONS FOR REVIEW:

APPEAL: N DATA PROBLEM: N LANDSCAPE: N LESS THAN 50 YEARS: N
OTHER: N PDIL: N PERIOD: N PROGRAM UNAPPROVED: N
REQUEST: N SAMPLE: N SLR DRAFT: Y NATIONAL: Y

COMMENT WAIVER: N

ACCEPT RETURN REJECT 3/25/05 DATE

ABSTRACT/SUMMARY COMMENTS:

Significant historic engineering work - one half of the bridge was recently destroyed by a storm. Bridge is nominated at the National level of significance - loss of a major portion of the bridge casts doubt on whether the bridge retains the necessary level of integrity to be justified as nationally significant.

RECOM./CRITERIA accept A&C

REVIEWER Patricia Anders DISCIPLINE Historian

TELEPHONE _____ DATE 3/25/2005

DOCUMENTATION see attached comments Y/N see attached SLR Y/N

If a nomination is returned to the nominating authority, the nomination is no longer under consideration by the NPS.

[<<Back](#)

Historic Covered Bridge Collapses into White River

Jan 3, 2006, 07:15 AM EST



By [Marlee Ginter](#)
24-Hour News 8

An Indiana bridge built back in the 1800's, and the only one of its kind in the world, is half under water. The Bell Ford Covered Bridge in Jackson County, at more than 130 years old, collapsed into the White River.



Residents see it every day.

"Oh yeah. I've been over that bridge millions of times," said Dave Bowman.

"And you could meet people in it," added Reva Lucas.

But that didn't keep them from gathering and stopping to stare.



"Just to take some pictures and see it one last time," said Jenny Cooley.

"Floatin' down? It was floatin' down the river," said Bowman.

Now they're at the bridge to share their stories.

"We used to walk across it a lot when we were dating and it's a lot of memory out here for us," said Jason Cooley.

"I've drove over that bridge since I was a day old," said Bowman.

Kenneth Self shared some of his memories with 24-Hour News 8. "We passed each other on this bridge... (laughs). It's just part of life. It's sad to see something like that happen."

The bridge was built back in 1868. It was made of both wood and iron, and engineers say that makes it the only one of its kind in the world.

"I just wish it had lasted so our grandkids could see it," said Lucas.

"Aw man, I hate to see it. The past is hard to preserve, and that's a lot of our past," added Self.

And as night set in, people still pulled over to catch a glimpse of the age-old bridge, hoping a piece of their history doesn't just float away.

The Department of Natural Resources will survey the bridge on Tuesday and see where things will go from there. Right now, it's a matter of determining the best way to get the bridge out of the water.

Meanwhile in Parke County, work is expected to begin next week on rebuilding a covered bridge

destroyed last April by arson. Organizers say they need 200 poplar trees and 20 to 25 oak trees to make the bridge historically correct. Tree offers have come in from all over the state. It's hoped the bridge will be complete by next October's Park County Covered Bridge Festival.



All content © Copyright 2000 - 2005 WorldNow and WISH-TV. All Rights Reserved.
For more information on this site, please read our [Privacy Policy](#) and [Terms of Service](#).



therepublic.com

Tuesday, January 03, 2006

Bell Ford bridge finishes collapse

Tuesday, January 03, 2006



Jeff Atkins of Seymour holds his daughter, Serenity, 11, months, as they survey the remains of the east span of the Bell Ford Bridge in Jackson County that plunged into into East Fork White River Monday. The west end of the historic covered bridge collapsed in February 1999. (The Republic photo by Joe Harpring)

SEYMOUR — The remains of Bell Ford Bridge plunged into East Fork White River on Monday, drawing crowds of onlookers and at least delaying plans for the historic span's restoration.

Officials believe the wood on the covered bridge's mid-section, supported by a stone pillar rising out of the river, rotted and gave way about 1 p.m. Monday. The collapsed bridge stuck at an angle into the water.

Only the east half of Bell Ford remained before Monday. The west side fell into the river in February 1999 during a winter storm.

The structure was built in 1869, and the county closed the structure to traffic in 1970.

Gary Darlage, Jackson County Commission president, said engineers and highway workers this morning would begin discussing how to remove the bridge's remains, and commissioners would address it during today's regular meeting.

"Our main objective is to get that out of there," he said, as he stood near the bridge, just off Indiana 258. "Then we'll take a look at whether we'll restore it."

Donald Schnitker, chief of Hamilton Township Volunteer Fire Department, reported the collapse to police about 1:30 p.m. after a trip to Seymour with his son.

Schnitker said that on his way to town, he noticed the old bridge was leaning, and its support cables seemed loose. When he returned 45 minutes later, the bridge had fallen.

Visitors

By early evening, a steady crowd of residents was stopping to see what remained. They reminisced and took photos as the sun set.

Jane Hays, public relations manager at Jackson County Visitor's Center, took photos for the center and said it was "very sad." She said many people visited the county to see the bridge.

Hays said Bell's Ford was the world's only covered bridge of post-truss construction, with iron in the timbers and a design that required no vertical framing.

Some community members hoped to renovate the bridge. Build Indiana Fund awarded an \$85,000 grant for the

project, and Indiana Department of Transportation had promised another \$900,000 if the community raised a 20 percent match, which it never did.

A somber crowd gathered to look at the collapsed bridge from under the Indiana 258 overpass, which ran past the old structure.

Amanda Jones, 20, of Cortland, stood in the mud and recalled playing on Bell's Ford as a child.

"It's sad," she said. "I wish they would've got it fixed before it fell."

Bruce Rice, 47, of Seymour, looked at the spot and recalled how his brother, Tony, drowned in that area just 20 yards from the bridge, in August 1983.

There were crowds then, too, he said, as police searched for his brother, and finally found him near one of Bell's Ford's stone supports.

"I don't come out here often," Rice said.

Related Links

Content © 2006 The Republic
Software © 1998-2006 **1up! Software**, All Rights Reserved



January 27, 2006

Michael Garris
Jackson County Highway Supervisor
360 South C.R. 25 East
Brownstown, IN 47220

Dear Mr. Garris,

Thanks to you and your colleagues Gary Darlage and Jason Fee for coming up to Indianapolis to meet with Steve Dilk, Joyce Newland, Keith Hoernschemeyer, and myself this past Monday. The meeting covered a wide array of options and possibilities for the Bells Ford Covered Bridge.

Let me begin by stating that the DHPA intends to give all reasonable consideration to Bells Ford Covered Bridge remaining on the National Register of Historic Places. We do not intend to remove the bridge from the Register, provided that reasonable progress is made toward a substantial rebuilding of the bridge within 12-18 months.

I was asked to comment specifically on one option, that of reconstructing a portion of the trusses of Bells Ford on land, at its historic site or at some other site within Jackson County. I did confer with Frank Hurdis and John Carr, both of our office, about this option. I discovered that the Section 106 review is in fact not complete for the project. At some point several years ago, our office requested some additional information; we never received a response. I have enclosed a copy of the letter requesting the additional items. In response to the question at hand, we would feel that reconstructing a few trusses of the bridge away from its intended site, using Federal funds, would constitute an adverse effect and require further negotiations.

Once your course of action is determined, please consult with Karie Brutis at 317-232-1646 so that your Section 106 filings can be reviewed, approved, and completed. We look forward to working with Jackson County on this project, should that be your choice.

Sincerely,

Paul C. Diebold
Senior Architectural Historian

PCD

cc: Gary Darlage (Jackson Co. Commissioners), Steve Dilk (INDOT), Jason Fee (Jackson Co. Engineer), Kieth Hoernschemeyer (FHWA), Joyce Newland (FHWA)



INDIANA
COVERED BRIDGE SOCIETY

NEWSLETTER

Volume No. 43

Winter 2006

Number 1

Lancaster Covered Bridge Restoration on the Web

For all of you out there who access to the Internet -- whether you know what a blog is or not -- you can now track the restoration progress of Carroll County's Lancaster Covered Bridge from the comfort of your chair with just the click of your mouse button. Link to <http://www.clrconstruction.blogspot.com/>.

For all of you who don't have such capability, you will find some of the pictures and narrative here, although they are much better in color.

The the anchoring system that the cast iron abutments were attached to is pictured first. There were



several iron rods connected from two eyebolts that are attached to a timber positioned in the middle between the two wings, the rods were also attached to end and middle upright columns, which in turn have the cast iron panels bolted to the upright columns. This was a sytem that was 130 years old....it didn't work very well then, and today it will go back in place in looks, but a modern design will take its place for

Continued Page 5

Remains of Bell Ford Covered Bridge Collapse

The eastern surviving section of the Bell Ford Covered Bridge just outside Seymour, Indiana, collapsed into the White River between 1:30 PM and 2:15 PM on January 2, 2006, casting grave doubts onto its possible reconstruction. Built in 1868, the bridge was called a Post Truss bridge because it was made of both wood and iron, and engineers say that made it the only surviving one of its kind in the world.



The Bell Ford Bridge has been closed to traffic since 1970 and the western span had fallen into the White River's East Fork during a February 1999 winter storm.

It remained for several days with part of it submerged into middle of the river and the end resting at an angle on the shore.

It is believed the wooden bridge's midsection, supported by a stone pillar rising from the river, rotted and gave way.

"Our main objective is to get that out of there," Darlage said. "Then we'll take a look at whether we'll restore it."

Continued Page 3

The NEWSLETTER is published four times a year for membership in the INDIANA COVERED BRIDGE SOCIETY, INC. Membership categories are: Annual-Single Family \$10.00, Contributing \$15.00, Sustaining \$25.00, Sponsoring \$50.00, Business-Corporate \$100.00, Public Library \$5.00, Life Membership \$250.00. Send all memberships and inquiries to the Indiana Covered Bridge Society, Inc., – John Sechrist, Treasurer, 6770 South East Street, Apt. 3, Indianapolis, IN 46227-2252. Send all articles, clippings and other news items to the editor or e-mail items to editor@icbsi.org.

President: Jim Jones, 8517 Chapel Pines Drive
Indianapolis, IN 46234

Vice President: Margaret Smith, 4414 North
Meridian Street, Indianapolis, IN 46208

Corresponding Secretary: Colleen Murray, 9832
Skipjack Cove, Fort Wayne, IN 46835

Recording Secretary: John Murray, 9832
Skipjack Cove, Fort Wayne, IN 46835

Treasurer: John Sechrist, 6770 South East Street,
Apt. 3, Indianapolis, IN 46227-2252

Newsletter Editor: Faril Ward, 407 Melrose Ave.,
Greencastle, IN 46135

Historian: John Sechrist, 6770 South East Street,
Apt. 3, Indianapolis, IN 46227-2252

Society Meeting Dates & Places for 2006 Set

Meeting dates have been set for the Society for 2006, according to President Jim Jones. They are:

March 5, 2006 – Winter Social Gathering in Indianapolis

April 29th & 30th -- Spring Meeting and tour of Jennings, Dearborn & Ripley Counties & Bridges

May 7th – Amos Schwartz Bridge Dedication at the Wiss Heritage Village in Berne, Indiana

July 29th & 30th -- Summer Meeting and tour of Connersville, Metamora and Franklin Counties

September 30 & October 1 – Annual Meeting and tour of Putnam & Owen Counties.

Mark those dates on your calendar now and details and an itinerary of each meeting will be coming to members during the year.

Fate of Bell Ford & Other Jackson County Bridges Uncertain

Described by one county official as a pile of rubble, the fate of the Bell Ford Covered Bridge was discussed at the January 18, 2006, meeting of the Jackson County Council.

That fate remains uncertain. The Council approved funding for removal and dismantling of the bridge. Those costs include \$32,500 for retrieving the bridge's remains from the river bed and an estimated \$20,000 to dismantle.

Council members asked commissioners President Gary Darlage about the bridge's fate Wednesday night. Darlage said he did not plan to use any additional tax dollars on the bridge.



The Medora Bridge in 1998

"I don't think we should use any cumulative bridge money on these old bridges when we have bridges out there that people drive over every day and need repaired," Darlage said. "I think it's time to let go of it."

Darlage said the county should try to sell what remains of the bridge to the highest bidder, and they could restore it if they would choose to do so. "Then we could help them find a place for it," Darlage said.

He added that right now, the bridge looked like a pile of rubble. The cost of restoring the bridge and placing it over the river is an estimated \$1.8 million, and that doesn't include the work it would take to obtain state permission to do so, Darlage said.

"It doesn't make any sense to me," Darlage said.

County roads supervisor Mike Garris and engineer

Continued Page 4

Bridgeton Rebuilding

The Bridgeton Covered bridge that an arsonist destroyed will be rebuilt starting in January using historically correct materials, including poplar trees hewn to replace the span's charred frame, officials said.

The Bridgeton Covered Bridge Design and Construction Team has tentatively accepted a bid for the project's first phase — the repair of the bridge's two sandstone abutments.

Groundbreaking for the new bridge was scheduled for Jan. 12 at the site about 15 miles northeast of Terre Haute, said Jim Meece, president of the Parke County Board of Commissioners.

"It's definitely a go. The board of commissioners has the final say, of course, but I don't anticipate any problems," said Meece, who's a member of the rebuilding team.

Meece said about \$145,000 has been raised toward the cost of the new bridge, which officials estimate will cost between \$1.2 million and \$1.5 million. While the sandstone abutments are under repair, members of the design and construction team will work to acquire the necessary construction permits from state and county officials.

Members of design and construction teams will also be contacting area businesses and individuals seeking additional donations to support the project.

"No amount is too small or too large," said Meece, who expects timber-framing of the rebuilt bridge to be underway this summer.

With dozens of property owners offering to donate poplar and oak trees for the project, foresters plan to visit more than 60 sites to evaluate trees and determine if they're suitable.

Foresters are evaluating scores of trees offered by property owners eager to help in the reconstruction of a covered bridge destroyed last year by an arsonist. The work to select and mark the trees is a big step in the effort to build a historically correct replica of the Bridgeton Bridge, said James Steen of Pike Lumber Co.

"It's the neatest thing to be a part of this experience. There hasn't been a covered bridge built around here in about 100 years," said Paul Myers, a forester with Pike Lumber Co.

The original bridge was built of poplar trees taken from the then-virgin forests around Parke County. Organizers estimate they will need about 200 poplar trees for the bridge's framework, arches and siding. They also need about 50 oak trees to provide planking for the new bridge's floor.

Bell Ford (Continued from Page 2)

Jason Fee told council they still must resolve several issues, including whether grant and donations would have to be repaid if the bridge is not restored and if restoration would have to occur at the bridge's location along Indiana 258 between Seymour and Cortland.

Fee said he also thinks the county needs to consider whether spending \$70,000 to stabilize the Medora covered bridge, the country's longest covered bridge at 434 feet, makes better sense than spending \$125,000 as a local match to obtain federal funds to restore the Medora bridge.

"That money's going to be sitting there and used for another covered bridge somewhere else if we don't use it," Fee said.

Darlage said he would keep council informed about issues surrounding the Bell Ford bridge in the coming weeks.


Koerner's motion to approve expenditures to remove and dismantle the bridge for storage until a decision can be made about its future, seconded by Councilwoman Debbie Hackman, was approved by the council on a 7-0 vote.

Bridgeton Donation Information

Donations to the fund established to rebuild the Bridgeton Bridge have topped \$70,000 and continue to climb. Please address donations to:

**Bridgeton Covered Bridge Association
Bridge Replacement Fund
c/o Old National Bank
P.O. Box 167
Rockville, IN 47872**

INDIANA COVERED BRIDGE LOCATION GUIDE



This is the second edition of the **INDIANA COVERED BRIDGE LOCATION GUIDE.**

I did the guide on my computer and took the unique cover photos for it. Inside are several pages of information about the covered bridges of Indiana with detailed maps showing highlights of each county. Also included are drawings

of the ten covered bridge truss types in Indiana.

I have received several "thank you" letters for the quality, value and usefulness of this edition.

The book sells for \$7.00 plus \$3.00 for shipping.

Arthur Gatewood Jr.

616 S. Oak Street, Fortville, IN 46040-1625

317-485-5351