



3464

DEC 29 1986

PNRO INVENTORY

National Park Service
Pacific Northwest Region
Cultural Resources Division

Westin Building Room 1920
2001 Sixth Avenue
Seattle, Washington 98121

NORTH CASCADES NATIONAL PARK

NAME(S) OF STRUCTURE/SITE <i>(Building)</i> GEORGE MILLER HOUSE/ NPS EMPLOYEE HOUSING		DATE OF CONSTRUCTION c. 1938-42	SITE ID. NO.	
SITE ADDRESS/LOCATION Stehekin Landing		ADDITION(S)	SCALE 1:24000	QUAD NAME Stehekin
DISTRICT Stehekin	COUNTY Chelan	STATE Washington	UTM ZONE 10	EASTING 673840
OWNER/ADMIN ADDRESS National Park Service		NORTHING 05353400		CROSS REFERENCE NOCA Bldg. #35 / V-27
		<input checked="" type="checkbox"/> CONTRIBUTING <input type="checkbox"/> NON-CONTRIBUTING	DANGER OF DEMOLITION? (SPECIFY THREAT)	
				<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> UNKNOWN

DESCRIPTION AND BACKGROUND HISTORY INCLUDING CONSTRUCTION DATE(S), PHYSICAL DIMENSIONS, MATERIALS, MAJOR ALTERATIONS, IMPORTANT BUILDERS, ARCHITECTS, ENGINEERS, ETC.

Residence. Log construction set on rock foundation; rectangle (22' x 32') with shed-roofed addition (kitchen) on east; 3 bays wide; 1 1/2-stories; round logs with planked ends and square-notched corners; wood-shaked gable roof extended on west to form porch overhang supported by log posts and exposed log purlins; center wood panel entrance with split wood surrounds on west; brick chimney with arched cap in addition; center metal stovepipe. Exterior features include 1/1 double-hung sash with molded surround; single pane fixed sash with plain surround; single and 2-pane sliding sash; 2-pane vertical casement sash; decorative fascia board on west; vertical half-round logs in pediment on west; clapboard siding on east addition; log porch railing with horizontal log skirting. Detached flat-roofed garage along road.

This residence was built in the late 1930s or early 1940s by Jack Blankenship. Guy Imus, Sr. (also known as Dad Imus) lived in this house in 1945-46. George Miller purchased this cabin and one adjacent (McKellar Cabin) in the late 1940s.

PUBLIC ACCESSIBILITY	<input checked="" type="checkbox"/> YES, LIMITED <input type="checkbox"/> NO	<input type="checkbox"/> YES, UNLIMITED <input type="checkbox"/> UNKNOWN	EXISTING SURVEYS	<input type="checkbox"/> NR	<input type="checkbox"/> HABS <input type="checkbox"/> NHL	<input type="checkbox"/> LCS <input type="checkbox"/> NPS	<input type="checkbox"/> STATE <input type="checkbox"/> COUNTY	<input type="checkbox"/> LOCAL <input type="checkbox"/> OTHER
LOCATED IN AN HISTORIC DISTRICT?	<input type="checkbox"/> YES <input type="checkbox"/> NAME	<input checked="" type="checkbox"/> NO	CONDITION	<input type="checkbox"/> EXCELLENT <input checked="" type="checkbox"/> GOOD	<input type="checkbox"/> FAIR <input type="checkbox"/> DETERIORATED	<input type="checkbox"/> RUINS		

SIGNIFICANCE *Eligible under Nat. Reg. Criterion A: for its association with recreational development in the North Cascades, and under Criterion C: as an example of a distinct type and method of construction. This is a good example of pre-WW II residential log cabin construction in the park. It incorporates the ethics of rustic architecture in its use of native/natural materials, combination of textures, and siting on the land. It possesses integrity of location, design, setting, materials, workmanship, feeling, and association. It is also associated with an early Stehekin Valley resident who built several log cabins and other structures at Stehekin Landing.*


PHOTOGRAPHS AND SKETCH MAP OF LOCATION



DETAIL



FROM S

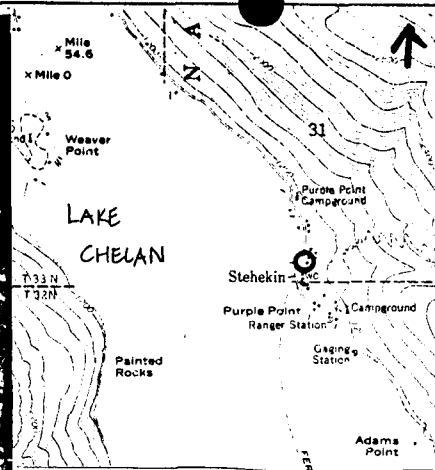

NEGATIVE NO. GL 34-10-16

HABS/HAER QUALITY

YES

NO

REFERENCES

Fellows, Vergil. Personal interview, 24 July 1984.

McConnell, Grant. Personal interview, 16 August 1984.

INVENTORIED BY *Gretchen Luxenberg*

AFFILIATION *NPS*

DATE *Summer 1984*